



Sterile Services Equipment

Preparation Tables - Variable Height	436
Preparation Tables - Fixed Height	437
Sterile Supplies Trolleys - UN3291 Certified	438
Sterile Supplies Trolleys - UN3291 Certified, Trolley Washer Compatible	440



Preparation Tables - Stainless Steel, Variable Height

Features

- 304 grade stainless steel frame & work surface
- Available as static or mobile
 - Static - Adjustable feet for levelling on uneven floors
 - Mobile - 80mm pressed steel castors, 2 off braking
- Height adjustable using a manual turn handle (folds away when not in use)
 - Static - 715 - 1015mm
 - Mobile - 812 - 1112mm
- Max capacity 70.0kg

Dimensions (w x d x h)

- Static - 1500 x 750 x 715 - 1015mm
- Mobile - 1500 x 750 x 812 - 1112mm



PT050

Item	Description	Weight
PT050	Stainless Steel, Variable Height, Static	49.0kg
PT110	Stainless Steel, Variable Height, Mobile	53.0kg

Preparation Tables - Stainless Steel, Fixed Height

Features

- 304 grade stainless steel frame & work surface
- Available as static or mobile
 - Static - Adjustable feet for levelling on uneven floors
 - Mobile - 80mm pressed steel castors, 2 off braking
- Worksurface height 950mm
- Max capacity 70.0kg

Dimensions (w x d x h)

- Overall Dimensions - 1500 x 750 x 950mm



Item	Description	Weight
PTS/115	Stainless Steel, Fixed Height, Static	56.3kg
PTS/115/M	Stainless Steel, Fixed Height, Mobile	58.8kg

Sterile Supplies Trolleys - UN3291 Certified

Features

- Independently tested to UN3291 - Certificate of Packaging Performance for the Transportation of Clinical Waste
- Suitable for the transportation of DIN & ISO instrument trays
- Mild steel frame with aluminium cladding, shelves & door/s
- Door/s...
 - Fitted with a flush fitting handle fitted with a CAM lock offering two-point locking (supplied with 2 keys)
 - When opened, doors fold back flat at either end of the trolley*
- Three adjustable shelves (max 40kg per shelf)
- Shelf size...
 - Small - 534 x 614mm (w x d)
 - Large - 1128 x 614mm (w x d)
- Removable stainless steel drip tray
- Inset push handles at either end of trolley
- Low level bumper rail offers protection to both the trolley & fabric of the building
- Optional tow bar fitting...
 - Tow bar fitted to the front (swivel castor)
 - Anti-luce fastener fitted to rear (fixed castor)
 - Tow bar position approx. 360 - 380mm above floor
 - Recommended max speed 7kph for towed trolleys
- 200mm heavy duty cushioned castors, 2 x fixed, 2 x swivel braking
- Maximum capacity...
 - Small - 84.0kg per trolley
 - Large - 109.0kg per trolley

*Doors will not fold back flat when a tow bar is fitted

Dimensions (w x d x h)

- Small - 805 x 774 x 1257mm
- Large - 1399 x 774 x 1257mm

Standard Colours


- Paint - Grey White



ST/340/UN

AGV Compatible Trolleys & Carts
We can provide solutions that are compatible with Sterile Supplies, Laundry, Medical Records & Pharmacy Distribution

Item	Description	Weight
Small		
ST/340/UN	UN3291 Certified, Small	74.5kg
Large		
ST/690/UN	UN3291 Certified, Large	110.0kg
ST/690/UN/T	UN3291 Certified, Towing, Large	114.0kg

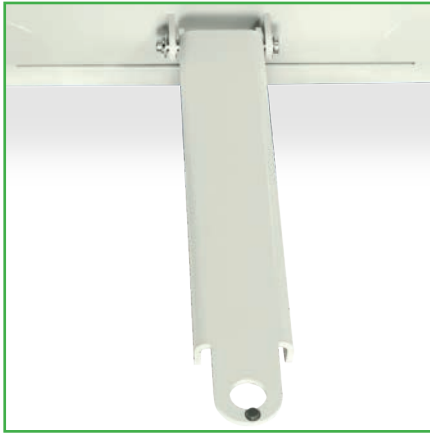

Tow Bar



Drip Tray



ST/690/UN

Sterile Supplies Trolleys - UN3291 Certified, Stainless Steel, Trolley Washer Compatible

Features

- Independently tested to UN3291 - Certificate of Packaging Performance for the Transportation of Clinical Waste
- Compatible with trolley washers
- Suitable for the transportation of DIN & ISO instrument trays
- 304 grade stainless steel frame, cladding, shelves & doors
- Natural unpolished finish
- Doors...
 - Fitted with a flush fitting handle fitted with a CAM lock offering two-point locking (supplied with 2 keys)
 - When opened, doors fold back flat at either end of the trolley*
- Spring loaded plungers hold the doors open, essential when the trolley is being processed in a trolley washer disinfectant
- One fixed, two adjustable shelves (max 50kg per shelf)
 - Shelf Size - 1227 x 632mm (w x d)
- Stainless steel drip tray...
 - Removable for cleaning
 - Can be located at the rear of the trolley during cleaning, held in position using spring loaded plungers
- Inset push handles at either end of trolley
- High level corner bumpers offer protection to both the trolley & fabric of the building
- Optional tow bar fitting...
 - Tow bar fitted to the front (swivel castor)
 - Antiluce fastener fitted to rear (fixed castor)
 - Tow bar position approx. 360 - 380mm above floor
 - Recommended max speed 7kph for towed trolleys
- 200mm heavy duty sealed bearing stainless steel castors, 2 x fixed, 2 x swivel braking
- Maximum capacity 136.0kg per trolley

*Doors will not fold back flat when a tow bar is fitted

Dimensions (w x d x h)

- Overall Dimensions - 1407 x 762 x 1288mm



STSS/690/UN

Item	Description	Weight
STSS/690/UN	UN3291 Certified, Stainless Steel, Trolley Washer Compatible	131.0kg
STSS/690/UN/T	UN3291 Certified, Stainless Steel, Trolley Washer Compatible, Towing	137.0kg

AGV Compatible Trolleys & Carts
We can provide solutions that are compatible with Sterile Supplies, Laundry, Medical Records & Pharmacy Distribution



Drip Tray Locates at Rear of Trolley
During Cleaning



High Level Corner Bumpers



STSS/690/UN