


What's New for 2026



New Website

www.bristolmaid.com, our new and improved website....

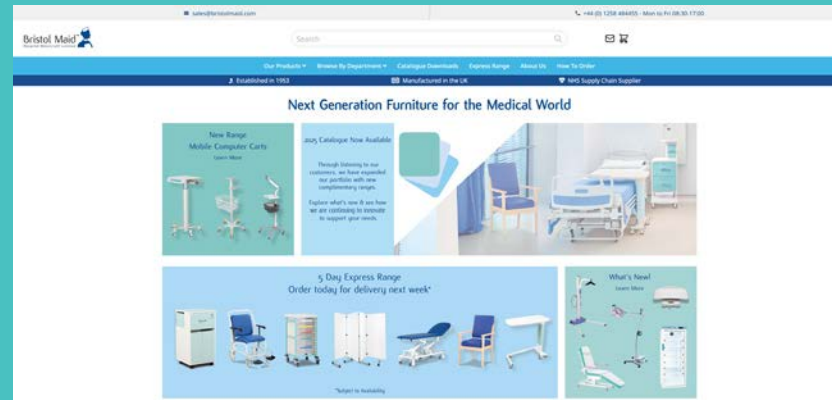

Website

| | |
|------------------------------------|----|
| Concealment Trolleys | 4 |
| Therapy Chairs | 8 |
| Patient Handling | 16 |
| Examination & Surgical Lighting | 38 |
| Pharmacy & Vaccine Refrigeration | 50 |
| Medical Measuring Systems & Scales | 56 |



Concealment Trolleys



Concealment Trolley - Variable Height

4

Concealment Trolley - Variable Height, Heavy Duty Castors

5



Concealment Trolley - Variable Height

Features

- Height adjustable using a handset operated rechargeable battery powered actuator
- Supplied with one rechargeable battery*
- Supplied with a wall mounted charge
- Brushed stainless steel top, 1980 x 690mm
- Drop down side-rails, distance between rails 720mm
- Bumper bar fitted to either end to protect the trolley & fabric of the building
- Drop down push handles at either end assist manoeuvrability
- Heavy duty reinforced PVC cover (locates over side-rails)
- 200mm castors, 3 x braking & 1 x directional locking. features a central locking & steering facility (suitable for use on smooth level surfaces)
- Maximum capacity 220kg

*Battery must be removed from the unit when charging

Dimensions (w x d x h)

- Floor to Stainless Steel Top - 2200 x 830 x 600 - 1200mm
- Floor to Top of Side-Rails - 2200 x 830 x 900 - 1500mm

Standard Colours

- Paint - Grey White

Accessories / Spares

- 2LIDE100 - Additional Rechargeable Battery
- 2LIDE105 - Charger for Rechargeable Battery
- 2FAC0024 - PVC Heavy Duty Cover



Braking & directional locking function

MCT/V/CC

| Item | Description | Weight |
|----------|---------------------------------------|--------|
| MCT/V/CC | Concealment Trolley - Variable Height | 91.0kg |

Concealment Trolley - Variable Height, Heavy Duty Castors

Features

- Height adjustable using a handset operated rechargeable battery powered actuator
- Supplied with one rechargeable battery*
- Supplied with a wall mounted charge
- Brushed stainless steel top, 1980 x 690mm
- Drop down side-rails, distance between rails 720mm
- Bumper bar fitted to either end to protect the trolley & fabric of the building
- Drop down push handles at either end assist manoeuvrability
- Heavy duty reinforced PVC cover (locates over side-rails)
- 200mm heavy duty cushioned castors, 2 x braking & 2 x directional locking
- Maximum capacity 220kg

*Battery must be removed from the unit when charging

Dimensions (w x d x h)

- Floor to Stainless Steel Top - 2200 x 830 x 600 - 1200mm
- Floor to Top of Side-Rails - 2200 x 830 x 900 - 1500mm

Standard Colours

- Paint - Grey White

Accessories / Spares

- 2LIDE100 - Additional Rechargeable Battery
- 2LIDE105 - Charger for Rechargeable Battery
- 2FAC0024 - PVC Heavy Duty Cover



MCT/V/HDCC Shown with supplied Heavy Duty cover



Directional locking function

Braking function

MCT/V/HDCC

| Item | Description | Weight |
|------------|---|--------|
| MCT/V/HDCC | Concealment Trolley - Variable Height, Heavy Duty Castors | 94.0kg |

Therapy Chairs



| | |
|--|----|
| Dialysis Chair - Sensa i | 8 |
| Dialysis Bed Chair - Silovo | 10 |
| Chemotherapy, Plasma Collection, Blood Donation Chair - Sensa Flex | 12 |



Dialysis Chairs - Sensa i

Features

- EN 60601-1:2006+A12:2014 Medical electrical equipment. General requirements for basic safety & essential performance
- Stepless, silent electric operation...
 - Sensa i Basic - Three drives provide adjustment of the back, foot & seat sections. Manually adjustable footrest (seat height 570mm)
 - Sensa i Premium - Five drives provide adjustment of the height, back, foot, seat sections & footrest (seat height 560-780mm)
- Chair can be configured to move into the Shock or Trendelenburg position in the case of an emergency
- 240V ~, 50/60Hz & fitted with a UK 3 pin plug & available with a hand switch
- Armrests...
 - Sensa i Basic - Full foam pad armrests
 - Sensa i Premium - Full foam pad armrests, rotatable & folding upwards, tiltable & height adjustable
- Seat back cover provides a smooth, easy clean surface, whilst a holder provides a location to support the power cord when moving the chair
- Clearance beneath frame allows access for mobile hoists 63mm
- Two-layer sandwich foam upholstered in flame retardant anti-microbial vinyl
- Castors...
 - Sensa i Basic - 75mm polymer twin wheel braking castors
 - Sensa i Premium - 100mm polymer twin wheel castors with central lock
- Underframe Cover...
 - Sensa i Basic - None
 - Sensa i Premium - Complete, allowing for fast & efficient cleaning
- Max capacity 250kg

Dimensions (w x d x h)

- Sensa i Basic - 870 x 2290 x 570mm
- Sensa i Premium - 870 x 2290 x 560 - 780mm
- Back / Seat / Foot Section 0° to 72° (Shock Position), -12° to 72° (Trendelenburg Position) / 0° to 25° / -25° to 27°
- Back / Seat / Foot Section in Shock Position 0° / 25° / 27°
- Back / Seat / Foot Section in Trendelenburg Position -12° / 25° / 27°

Vinyl - Vowalon

Alternative colours available at additional cost. Change suffix 'VAG' on the end of the product code with any of the following e.g. Dialysis Chair - Sensa i Basic in Azure - 5LK/61-I-00/PR/VST/VAZ



VST VAG VAZ VSAP VSAF VKI

| Item | Description | Weight |
|----------------|--|---------|
| 5LK/61-I-00 | Dialysis Chair - Sensa i Basic - Three Drives | 85.0kg |
| 5LK/61-I-00-PR | Dialysis Chair - Sensa i Premium - Five Drives | 100.0kg |

Standard Colours

- Vinyl - Sapphire / Stone
- Paint - Stone



5LK/61-I-00/VST/VAG
Shown with optional pillow



Full foam pad armrests



5LK/61-I-00/PR/VST/VAG
Shown with optional light

| Options | Description | Sensa i Basic | Sensa i Premium |
|--------------|--|---------------|-----------------|
| 5LK/61-18-18 | Trendelenburg Position | | ✓ |
| 5LK/61-18-11 | Underframe Cover - Light | ✓ | |
| 5LK/61-18-51 | Antimicrobial Upholstery | ✓ | ✓ |
| 5LK/61-18-37 | Transparent, Cleanable Protective Cover for Foot Section | ✓ | ✓ |
| 5LK/61-18-38 | Transparent, Cleanable Protective Cover for Footrest | ✓ | ✓ |
| 5LK/61-18-78 | Swivelling Table | ✓ | ✓ |
| 5LK/61-18-55 | Equipotential Bonding Cable | ✓ | ✓ |
| 5LK/61-18-88 | CPR Release | ✓ | ✓ |
| 5LK/61-18-75 | USB Charging Port | | ✓ |
| 5LK/61-18-74 | USB Reading Lamp (USB charging point required) | | ✓ |
| 5LK/61-18-47 | Visco Foam Upholstery | | ✓ |
| 5LK/61-18-28 | Relax Pillow | | ✓ |
| 5LK/61-18-29 | Battery | | ✓ |

Dialysis Bed Chair - Silovo

Features

- EN 60601-1:2006+A12:2014 Medical electrical equipment. General requirements for basic safety & essential performance
- Space Saving Bed Chair
- Stepless, silent electric operation...
 - Silovo Basic - Four drives provide adjustment of the height, back, foot & seat sections. Manually adjustable footrest
 - Silovo Premium - Five drives provide adjustment of the height, back, foot, seat sections & footrest
- In an emergency, the bed chair can be moved into the Shock position, or using a separate button, moved quickly into the Trendelenburg position
- Foam mattress with light blue PU cover
- 240V ~, 50/60Hz & fitted with a UK 3 pin plug & available with a hand switch
- Clearance beneath frame allows access for mobile hoists 96mm
- 100mm polymer twin wheel central locking castors
- Max capacity 250kg

Dimensions (w x d x h)

- Silovo Basic - 870 x 2230 x 540 - 790mm (without attachments)
- Silovo Premium - 950 x 2260 x 540 - 790mm (without attachments)
- Back / Seat / Foot Section 0° to 70° / 0° to 15° / -15° to 15°
- Back / Seat / Foot Section in Shock Position 0° / 15° / 15°
- Back / Seat / Foot Section in Trendelenburg Position -15° / 15° / 15°

Standard Colours

- PU Cover - Light Blue
- Paint / Plastics - Grey

Options

- 5LK/93-27-26 - Visco Foam Mattress with Light Blue PU Cover
- 5LK/92-10-45-OPT - Relax Pillow with Light Blue PU Cover
- 5LK/93-10-68 - Headrest with Inlay in Grey
- 5LK/93-10-62 - Grey Removable PU Moulded Armrests, Rotating, Fold Upwards, Tilttable & Height Adjustable
- 5LK/93-12-10-OPT - USB Charging Port
- 5LK/93-12-11-OPT - USB Reading Lamp (USB charging point required)
- 5LK/93-10-44-R-OPT - Right-Hand, Drop Down-Side Rails (two part)
- 5LK/93-10-44-L-OPT - Left-Hand, Drop Down-Side Rails (two part)
- 5LK/90-00-75-V2 - Sit-Up Aid, Includes Handle
- 5LK/92-10-47-OPT - Infusion Bag Holder
- 5LK/93-10-76-OPT - Infusion Pole Holder
- 5LK/60-00-91 - Infusion Pole, Includes Bottle Holder
- 5LK/57-10-45-OPT - Equipotential Bonding Cable (requirement when carrying out intracardiac procedures)
- 5LK/92-10-46-OPT - Wedge-Shaped Pillow for the Arm with Grey PU Cover



5LK/93-A4-01

Shown with optional mattress, relax pillow, light, headrest, armrests & footrests

| Item | Description | Weight* | |
|--------------|---|-------------|-----------------------------|
| 5LK/93-A4-01 | Dialysis Bed Chair - Silovo Basic - Four Drives | 100-200.0kg | |
| 5LK/93-A5-01 | Dialysis Bed Chair - Silovo Premium - Five Drives | 100-200.0kg | *Depending on configuration |



Shown with optional sit-up aid

Chemotherapy, Plasma Collection, Blood Donation Chair - Sensa Flex

Features

- EN 60601-1:2006+A12:2014 Medical electrical equipment. General requirements for basic safety & essential performance
- Stepless, silent electric operation...
 - Sensa Flex A3 - Three drives provide adjustment of the back, foot & seat sections (seat height 570mm)
 - Sensa Flex A4 - Four drives provide adjustment of the height, back, foot & seat sections (seat height 570 - 780mm)
- In the case of an emergency, the chair can be moved quickly into the Shock or Trendelenburg position
- 240V ~, 50/60Hz & fitted with a UK 3 pin plug & available with a hand switch
- Rotating, folding & tilting armrests with upholstered foam armrest pads
- Clearance beneath frame allows access for mobile hoists 63mm
- Two-layer sandwich foam upholstered in flame retardant anti-microbial vinyl
- Neck roll headrest
- 75mm polymer twin wheel braking castors
- Max capacity 200kg

Dimensions (w x d x h)

- Sensa Flex A3 - 844 x 1987 x 570mm
- Sensa Flex A4 - 844 x 1987 x 570 - 780mm
- Back Section 0° to 81° (Shoulder Area) / -20° to 61° (Loin Area)
- Seat Section 7° to 20°
- Foot Section -77° to 20° / 20° (Shock / Trendelenburg Position)

Standard Colours

- Vinyl - Sapphire
- Paint - Stone

Vinyl - Vowalon

Alternative colours available at additional cost. Change suffix 'VKI' on the end of the product code with any of the following e.g. Chemotherapy, Plasma Collection, Blood Donation Chair - Sensa Flex A4 in Saffron - 5LK/61-F3-00/VSAP



VST VAG VAZ VSAP VSAF VKI



5LK/61-F3-00/VSAP

| Item | Description | Weight |
|--------------|--|--------|
| 5LK/61-F3-00 | Chemotherapy, Plasma Collection, Blood Donation Chair - Sensa Flex A3 - Three Drives | 60.0kg |
| 5LK/61-F4-00 | Chemotherapy, Plasma Collection, Blood Donation Chair - Sensa Flex A4 - Four Drives | 75.0kg |



Shown with optional table




Shown with optional infusion pole

| Options | Description | Sensa Flex A3 | Sensa Flex A4 |
|-------------------|--|---------------|---------------|
| 5LK/61-10-601-OPT | Antimicrobial Upholstery | ✓ | ✓ |
| 5LK/57-10-52-OPT | Armrests with Additional Tilt-Adjustment | ✓ | ✓ |
| 5LK/61-12-104-OPT | Battery | ✓ | |
| 5LK/61-12-105-OPT | Battery | | ✓ |
| 5LK/57-10-36-OPT | Transparent, Cleanable Protective Cover for Foot Section | ✓ | ✓ |
| 5LK/57-10-49-OPT | Transparent, Cleanable Protective Cover for Low Wedge-Shaped Armrests (each) | ✓ | ✓ |
| 5LK/57-10-28-OPT | Paper Roll Holder | ✓ | ✓ |
| 5LK/61-10-74-OPT | Infusion Pole Holder Right & Left Rotatable | ✓ | |
| 5LK/61-10-539-OPT | Infusion Pole Holder Right & Left Rotatable | | ✓ |
| 5LK/60-00-91 | Infusion Pole, Includes Bottle Holder | ✓ | ✓ |
| 5LK/61-10-115-OPT | Swivelling Table | ✓ | ✓ |
| 5LK/61-12-106-OPT | USB Charging Port | ✓ | ✓ |
| 5LK/57-10-63-OPT | USB Reading Lamp (USB charging point required) | ✓ | ✓ |
| 5LK/57-12-05-OPT | CPR Release | ✓ | ✓ |

Patient Handling



| | |
|----------------------|----|
| Passive Lifts | 16 |
| Active Standing Aids | 22 |
| Accessories & Slings | 26 |



Passive Lift - Oxford® Advance

Features

- Exceptionally versatile & easy to manoeuvre
- Ergonomic design considerations & interaction points
- Compact triangular folding design for easy transport & storage
- Smart™ Monitor diagnostic & service controls as standard
- Interchangeable spreader bar / cradle options
- Safe working load 155kg

Dimensions (w x d x h)

- Overall Dimensions (Max) - 1080 x 1300 x 1860mm
- Overall Dimensions (Min) - 670 x 1250 x 1360mm

Standard Colours

- Grey / Periwinkle

Options / Accessories

- 5OX/AC/SPC/4 - Oxford® 4-Point Positioning Cradle, Shallow, Manual



5OX/PL/AD

Optional shallow 4-point cradle providing the carer with a greater choice of sling systems



5OX/AC/SPC/4

| Item | Description | Weight |
|-----------|--------------------------------|--------|
| 5OX/PL/AD | Passive Lift - Oxford® Advance | 31.7kg |

Passive Lift - Oxford® Presence

Features

- Outstanding lifting range (430mm - 1910mm)
- Ergonomic design considerations & interaction points
- Powered leg positioning
- Smart™ Monitor diagnostic & service controls as standard
- Interchangeable spreader bar / cradle & weigh-scale options
- Safe working load 227kg

Dimensions (w x d x h)

- Overall Dimensions (Max) - 1150 x 1460 x 2065mm
- Overall Dimensions (Min) - 670 x 1400 x 1460mm

Standard Colours

- Grey / Periwinkle

Options / Accessories

- 5OX/SBC/4 - Oxford® 4-Point Positioning Cradle, Manual
- 5OX/AC/PPC/4 - Oxford® 4-Point Positioning Cradle, Powered
- 5OX/AC/SAC - Oxford® Stretcher Adjustment Cradle
- 5OX/AS/CS - Oxford® Canvas Stretcher
- 5OX/WS/100 - Oxford® Digital Weigh Scale, 4-Point Cradle, Manual
- 5OX/WS/101 - Oxford® Digital Weigh Scale, 6-Point Spreader Bar, Manual
- 5OX/WS/102 - Oxford® Digital Weigh Scale, 4-Point Cradle, Powered



Shown with 4-point positioning cradle



| Item | Description | Weight |
|--------------|---------------------------------|--------|
| 5OX/PL/AD/PR | Passive Lift - Oxford® Presence | 40.0kg |

Passive Lift - Oxford® Presence, Low Leg

Features

- Outstanding lifting range (430mm - 1910mm)
- Ergonomic design considerations & interaction points
- Powered leg positioning
- Smart™ Monitor diagnostic & service controls as standard
- Interchangeable spreader bar / cradle options & weigh-scale options
- Safe working load 227kg

Dimensions (w x d x h)

- Overall Dimensions (Max) - 1150 x 1460 x 2065mm
- Overall Dimensions (Min) - 670 x 1400 x 1460mm

Standard Colours

- Grey / Periwinkle

Options / Accessories

- 50X/SBC/4 - Oxford® 4-Point Positioning Cradle, Manual
- 50X/AC/PPC/4 - Oxford® 4-Point Positioning Cradle, Powered
- 50X/AC/SAC - Oxford® Stretcher Adjustment Cradle
- 50X/AS/CS - Oxford® Canvas Stretcher
- 50X/WS/100 - Oxford® Digital Weigh Scale, 4-Point Cradle, Manual
- 50X/WS/101 - Oxford® Digital Weigh Scale, 6-Point Spreader Bar, Manual
- 50X/WS/102 - Oxford® Digital Weigh Scale, 4-Point Cradle, Powered



50X/PL/AD/PR/LL

| Item | Description | Weight |
|-----------------|--|--------|
| 50X/PL/AD/PR/LL | Passive Lift - Oxford® Presence, Low Leg | 40.0kg |

Passive Lift - Oxford® Stature

Features

- Outstanding lifting range (390mm - 1550mm)
- Ergonomic design considerations & interaction points
- Powered leg positioning
- Smart™ Monitor diagnostic & service controls as standard
- Interchangeable spreader bar / cradle & weigh-scale options
- Safe working load 227kg

Dimensions (w x d x h)

- Overall Dimensions (Max) - 1360 x 1390 x 2130mm
- Overall Dimensions (Min) - 760 x 1290 x 1945mm

Standard Colours

- Grey / Periwinkle

Options / Accessories

- 5OX/SBC/6 - Oxford® 6-Point Positioning Cradle, Manual (Stature Only)
- 5OX/AC/SAC - Oxford® Stretcher Adjustment Cradle
- 5OX/AS/CS - Oxford® Canvas Stretcher
- 5OX/WS/100 - Oxford® Digital Weigh Scale, 4-Point Cradle, Manual
- 5OX/WS/101 - Oxford® Digital Weigh Scale, 6-Point Spreader Bar, Manual
- 5OX/WS/102 - Oxford® Digital Weigh Scale, 4-Point Cradle, Powered



5OX/PL/ST

| Item | Description | Weight |
|-----------|--------------------------------|--------|
| 5OX/PL/ST | Passive Lift - Oxford® Stature | 73.5kg |

Passive Lift - Oxford® Calibre

Features

- Integrated Class III digital weigh-scale for patient monitoring
- Ergonomic design considerations & interaction points
- Large 6-point cradle provides improved comfort for larger clients
- Powered leg positioning
- Twin pivoted front castors offer good manoeuvrability
- Smart™ Monitor diagnostic & service controls as standard
- Safe working load 385kg

Dimensions (w x d x h)

- Overall Dimensions (Max) - 1420 x 1805 x 2210mm
- Overall Dimensions (Min) - 885 x 1740 x 1575mm

Standard Colours

- Grey / Periwinkle



50X/PL/CA



6-point cradle provides improved comfort and support



| Item | Description | Weight |
|-----------|--------------------------------|---------|
| 50X/PL/CA | Passive Lift - Oxford® Calibre | 112.0kg |



50X/PL/AD



50X/PL/AD/PR



50X/PL/ST



50X/PL/AD/PR/LL

Active Stand Aid - Oxford® Switch

Features

- Versatile & easy to manoeuvre
- Easy to transport & store
- Ergonomic design considerations & interaction points
- Adjustable knee pads & optional padded knee covers
- Optional belts for additional support
- Safe working load 180kg

Dimensions (w x d x h)

- Overall Dimensions - 550 x 670 x 1170mm

Standard Colours

- Grey / Periwinkle

Options / Accessories

- 5OX/SL3151 - Oxford® Patient Handling Belt - Small (Red)
- 5OX/SL3152 - Oxford® Patient Handling Belt - Medium (Yellow)
- 5OX/SL3153 - Oxford® Patient Handling Belt - Large (Green)
- 5OX/AC/PKC - Oxford® Padded Knee Covers



5OX/AS/SW

Even weight distribution ensures excellent stability and manoeuvrability



5OX/AC/PKC - Optional Padded Knee Covers



| Item | Description | Weight |
|-----------|-----------------------------------|--------|
| 5OX/AS/SW | Active Stand Aid - Oxford® Switch | 16.0kg |

Active Stand Aid - Oxford® Up

Features

- Disassembles for easy storage & transportation
- Adjustable leg opening for access around furniture
- Contoured swing-away seat pads
- Ergonomic design considerations & interaction points
- Compatible sling offers additional support
- Safe working load 200kg

Dimensions (w x d x h)

- Overall Dimensions (Max) - 845 x 950 x 1100mm
- Overall Dimensions (Min) - 630 x 950 x 1100mm

Standard Colours

- Grey / Periwinkle



50X/AS/UP

Disassembles for easy storage



| Item | Description | Weight |
|-----------|-------------------------------|--------|
| 50X/AS/UP | Active Stand Aid - Oxford® Up | 33.0kg |

Active Stand Aid - Oxford® Journey

Features

- Compact folding design which offers easy storage & transportation
- Unique adjustable cow horn function accommodates a range of patients
- Ergonomic design considerations & interaction points
- Smart™ Monitor diagnostic & service controls as standard
- Contoured, height adjustable knee pad
- Retractable safety belt
- Removable foot tray for rehabilitation activity
- Safe working load 155kg

Dimensions (w x d x h)

- Overall Dimensions (Max) - 970 x 1000 x 1600mm
- Overall Dimensions (Min) - 685 x 935 x 1130mm

Standard Colours

- Grey / Periwinkle



50X/AS/JO

Folds down for easy storage



| Item | Description | Weight |
|-----------|------------------------------------|--------|
| 50X/AS/JO | Active Stand Aid - Oxford® Journey | 40.2kg |

Active Stand Aid - Oxford® Ascend

Features

- Powered leg positioning for excellent access around furniture
- Ergonomic design considerations & interaction points
- Smart™ Monitor diagnostic & service controls as standard
- Height adjustable knee pad
- Removable foot tray for rehabilitation activity
- Safe working load 200kg

Dimensions (w x d x h)

- Overall Dimensions (Max) - 995 x 1100 x 1710mm
- Overall Dimensions (Min) - 630 x 1000 x 1070mm

Standard Colours

- Grey / Periwinkle



| Item | Description | Weight |
|-----------|-----------------------------------|--------|
| 50X/AS/AS | Active Stand Aid - Oxford® Ascend | 47.0kg |

Oxford® Patient Handling Belts

Features

- Offers carers a means of providing standing assistance to the patient
- Side handles for standing assistance & support
- Non-slip inner layer ensures secure fit
- Elasticated top band for increased comfort
- Available in small, medium & large, colour coded binding indicates belt size
- Safe working load 200kg



50X/SL3152

| Item | Description |
|------------|---|
| 50X/SL3151 | Oxford® Patient Handling Belt - Small (Red) |
| 50X/SL3152 | Oxford® Patient Handling Belt - Medium (Yellow) |
| 50X/SL3153 | Oxford® Patient Handling Belt - Large (Green) |

Quickfit Colour Coding



Oxford® Padded Knee Covers

Features

- Padded covers provide additional comfort



50X/AC/PKC

| Item | Description |
|------------|----------------------------|
| 50X/AC/PKC | Oxford® Padded Knee Covers |

Oxford® 4-Point Positioning Cradles & 6-Point Spreader Bar

Features

- Uses the Securi3 safety clip system
- Adjustments made using the cradle handle to achieve an upright or reclined position for the patient
- Allows the carer to position the patient for optimum recline & comfort
- 4-Point Cradles available as either manual or powered (lift dependant)

Standard Colours

- Periwinkle



50X/AC/PPC/4



50X/SBC/6



Hoist not included

| Item | Description | Weight |
|--------------|---|--------|
| 50X/AC/SPC/4 | Oxford® 4-Point Positioning Cradle, Shallow, Manual (Advance Only) | 5.0kg |
| 50X/SBC/4 | Oxford® 4-Point Positioning Cradle, Manual (Presence Only) | 6.5kg |
| 50X/AC/PPC/4 | Oxford® 4-Point Positioning Cradle, Powered (Presence and Stature Only) | 9.0kg |
| 50X/SBC/6 | Oxford® 6-Point Spreader Bar, Manual (Stature Only) | 2.2kg |

Oxford® Stretcher Adjustment Cradle

Features

- Adjustment can be made by operating either the left or right-hand levelling handles
- Balance can be adjusted using one hand
- Safe working load 227kg (when used with the Oxford® Canvas Stretcher)

Standard Colours

- Grey / Periwinkle



Shown with optional Oxford® Canvas Stretcher

| Item | Description |
|------------|-------------------------------------|
| 50X/AC/SAC | Oxford® Stretcher Adjustment Cradle |


Oxford® Canvas Stretcher

Features

- Takes up relatively little space during use & when in storage
- Canvas element can be laundered in a washing machine at up to 85°C
- Safe working load 227kg (when used with the Oxford® stretcher adjustment cradle)

Standard Colours

- Blue

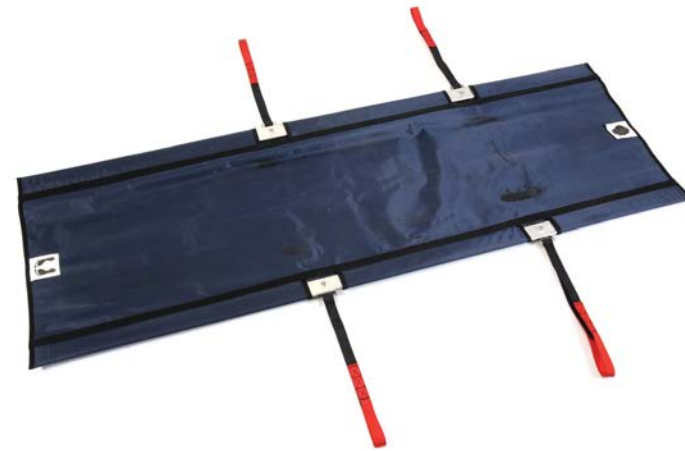

| Item | Description |
|-----------|--------------------------|
| 50X/AS/CS | Oxford® Canvas Stretcher |

Oxford® Digital Weigh-Scale

Features

- Compact, low-profile design ensures lift height is not compromised
- Integrated dual-screen display, allows the read-out to be viewed from either side of the boom
- Provides an accurate measurement of weight for on-going patient observation
- Available in 3 different attachment versions...
- 4-Point Cradle, Manual
- 6-Point Spreader Bar, Manual
- 4-Point Cradle, Powered
- Safe working load 400kg (dependant on the hoist / accessory being used)

Standard Colours

- Grey



| Item | Description | Weight |
|------------|---|--------|
| 50X/WS/100 | Oxford® Digital Weigh Scale, 4-Point Cradle, Manual | 7.2kg |
| 50X/WS/101 | Oxford® Digital Weigh Scale, 6-Point Spreader Bar, Manual | 2.6kg |
| 50X/WS/102 | Oxford® Digital Weigh Scale, 4-Point Cradle, Powered | 9.5kg |

Oxford® Comfort Disposable Slings

Features

- Patented Securi3 clip attachment points
- Modesty loop helps protect patient dignity during transfer
- Available in extra small, small, medium, large & extra-large, colour coded binding indicates sling size
- Safe working load 227kg



50X/PH/CD/ME

| Item | Description |
|--------------|--|
| 50X/PH/CD/XS | Oxford® Comfort Disposable Sling - Extra Small (Brown) |
| 50X/PH/CD/SM | Oxford® Comfort Disposable Sling - Small (Red) |
| 50X/PH/CD/ME | Oxford® Comfort Disposable Sling - Medium (Yellow) |
| 50X/PH/CD/LG | Oxford® Comfort Disposable Sling - Large (Green) |
| 50X/PH/CD/XL | Oxford® Comfort Disposable Sling - Extra Large (Blue) |

Oxford® Full Back Disposable Slings

Features

- Integrated, boned head support & leg padding as standard
- Coloured attachment loops promote correct / safe positioning
- Modesty loop helps protect patient dignity during transfer
- Available in extra small, small, medium, large & extra-large, colour coded binding indicates sling size
- Safe working load 227kg



50X/PH/FBD/ME

| Item | Description |
|---------------|--|
| 50X/PH/FBD/XS | Oxford® Full Back Disposable Sling - Extra Small (Brown) |
| 50X/PH/FBD/SM | Oxford® Full Back Disposable Sling - Small (Red) |
| 50X/PH/FBD/ME | Oxford® Full Back Disposable Sling - Medium (Yellow) |
| 50X/PH/FBD/LG | Oxford® Full Back Disposable Sling - Large (Green) |
| 50X/PH/FBD/XL | Oxford® Full Back Disposable Sling - Extra Large (Blue) |

Oxford® Quickfit Deluxe Disposable Slings

Features

- Padded leg sections for increased comfort
- Coloured attachment loops promote correct / safe positioning
- Available in small, medium & large, colour coded binding indicates sling size
- Safe working load 227kg



50X/PH/QDD/ME

| Item | Description |
|---------------|--|
| 50X/PH/QDD/SM | Oxford® Quickfit Deluxe Disposable Sling - Small (Red) |
| 50X/PH/QDD/ME | Oxford® Quickfit Deluxe Disposable Sling - Medium (Yellow) |
| 50X/PH/QDD/LG | Oxford® Quickfit Deluxe Disposable Sling - Large (Green) |

Oxford® Deluxe Standing Disposable Slings

Features

- Fully padded design offers excellent comfort
- Coloured attachment loops promote correct / safe positioning
- Non-slip back section ensures the sling does not 'ride up'
- Adjustable waist strap for added support & security
- Available in small, medium & large, colour coded binding indicates sling size
- Safe working load 200kg



| Item | Description |
|---------------|--|
| 5OX/PH/DSD/SM | Oxford® Deluxe Standing Disposable Sling - Small (Red) |
| 5OX/PH/DSD/ME | Oxford® Deluxe Standing Disposable Sling - Medium (Yellow) |
| 5OX/PH/DSD/LG | Oxford® Deluxe Standing Disposable Sling - Large (Green) |

Sling Compatibility & Task Selection

This chart will help guide you with the compatibility of a sling & hoist and the appropriate use of each combination for a given task. There may be exceptions to this.

We recommend a full patient risk assessment is carried out prior to any transfer to determine individual requirements.

Oxford® Advance & Oxford Presence

- Supplied as Standard - 6-Point Spreader Bar
- Optional Accessory - 4-Point Cradle

Oxford® Stature

- Supplied as Standard - 4-Point Cradle
- Optional Accessory - 6-Point Spreader Bar



| Sling Type | Sling Sizes | Sling Attachment Type | Oxford Advance | Oxford Presence | Oxford Stature | Oxford Ascend | Oxford Journey | Chair to Chair | Bed to Chair | Chair to Commode / Toilet | Commode to Bath | Floor to Bed / Chair | Rehab / Assisted Standing |
|----------------------------|---------------------|-----------------------|----------------|-----------------|----------------|---------------|----------------|----------------|--------------|---------------------------|-----------------|----------------------|---------------------------|
| Comfort Disposable | XS / S / M / L / XL | Clip | √** | √** | √** | | | √ | √ | √ | √ | √ | |
| Full Back Disposable | XS / S / M / L / XL | Loop | √* | √* | √* | | | √ | √ | √ | √ | √ | |
| Quickfit Deluxe Disposable | S / M / L | Loop | √* | √* | √* | | | √ | √ | √ | √ | √ | |
| Deluxe Standing Disposable | S / M / L | Loop | | | | √ | √ | √ | √ | √ | | | √ |

*In conjunction with a 6-point spreader bar

**In conjunction with a 4-point cradle

Examination & Surgical Lighting



| | |
|---------------------------------------|----|
| Surgical Lighting | 38 |
| Minor Surgical & Examination Lighting | 39 |
| Examination Lighting | 41 |
| Illuminated Magnifier | 46 |

Surgical Lighting - Astramax AM30 Mobile, 150kLux

Features


- Full spectrum colour rendition, allows small differences to be easy to distinguish
- Fat beam illumination ensures high light intensity across the full illuminated area
- Red balance control provides enhanced visualisation of red tissues, & improved differentiation between tissues of similar colour
- Ultra slim & light-weight lamp head enables smooth, fast & precise positioning during procedures
- Astramax HD-LED® provides 150,000 Lux output at 1 metre & offers a long life of >60,000 hours, equating to more than 20 years of normal use
- A large illuminated area of 320mm diameter makes it easier to illuminate large areas of tissue & target light onto the wound
- An even spread of LEDs across the lighting surface ensures even distribution & enables excellent shadow control
- The lamp head is mounted on arms with a multi-movement mechanism, allowing positioning within a wide envelope of movement
- Five rotations allow easy positioning of the light beam from any angle
- Uses less than 50 watts of power & with >60,000 hours of LED life, Astramax HD-LED® saves money on energy & maintenance
- Base fitted with four castors allows the light to be easily positioned
- The lamp head is sealed to IP54 to protect from ingress of dirt fluids, whilst smooth surfaces of the lamp head allow for easy disinfection
- The lamp head is manoeuvred using a sterilisable handle (disposable handles are available as an option)
- Integral emergency backup battery provides 3hrs life (minimum)

Dimensions (w x d x h)

- 5EXL/AM30MO - 620 x 630 x 1608mm
- 5EXL/AM30MEL - 564 x 630 x 1608mm

Standard Colours

- White

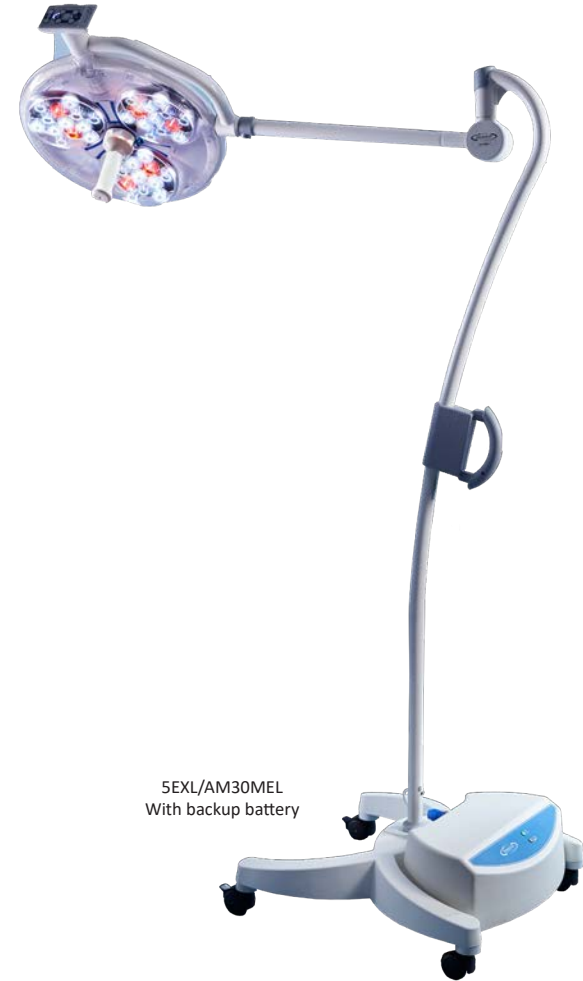

5EXL/AM30MEL
With backup battery

| Item | Description | Weight |
|--------------|--|--------|
| 5EXL/AM30MO | Surgical Lighting - Astramax 30 Series Lamp (150kLux), Mobile, UK Plug Lead | 18.0kg |
| 5EXL/AM30MEL | Surgical Lighting - Astramax 30 Series Main Lamp (150kLux) Mobile, UK Plug Lead, Integral Emergency Backup Battery | 32.0kg |

Minor Surgical & Examination Lighting - Astralite® ALE10 Mobile, 100kLux

Features

- Full spectrum colour rendition, allows small differences to be easy to distinguish
- Fat beam illumination ensures high light intensity across the full illuminated area
- Red balance control provides enhanced visualisation of red tissues, & improved differentiation between tissues of similar colour
- The Astralite® warm / cold range ensures excellent visualisation of skin issues for all skin tones
- Astralite® HD-LED® provides 100,000 Lux output at 1 metre & offers a long life of >50,000 hours, equating to more than 20 years of normal use
- A large, illuminated area of 250mm diameter makes it easier to illuminate large areas of tissue, & target light into the wound
- Easy to use controls...
 - Auto-on when any control is touched
 - Focusable beam by twisting the handle
 - Light intensity control (8 steps)
 - Adjustable colour by red balance control
- Ultra slim & light-weight lamp head enables smooth, fast & precise positioning during procedures
- The lamp head is mounted on arms with a multi-movement mechanism, allowing positioning within a wide envelope of movement
- Five rotations allow easy positioning of the light beam from any angle
- Uses less than 50 watts of power & with >50,000 hours of LED life, Astralite® HD-LED® saves money on energy & maintenance
- Base fitted with four castors allows the light to be easily positioned
- The lamp head is sealed to IP54 to protect from ingress of dirt fluids, whilst the use on anti-microbial & smooth surfaces allow for easy disinfection
- The lamp head is manoeuvred using a sterilisable handle (disposable handles are available as an option)
- Integral emergency backup battery provides 3hrs life (minimum)

Dimensions (w x d x h)

- 5EXL/ALE10MO - 620 x 630 x 1608mm
- 5EXL/ALE10MEL - 620 x 630 x 1608mm
- 5EXL/ALE10MTA - 620 x 630 x 1608mm
- 5EXL/ALE10MTD - 564 x 630 x 1608mm

Standard Colours

- White



| Item | Description | Weight |
|---------------|---|--------|
| 5EXL/ALE10MO | Minor Surgical & Examination Lighting - Astralite 10 Series Lamp (100kLux), Mobile, UK Plug Lead | 16.0kg |
| 5EXL/ALE10MEL | Minor Surgical & Examination Lighting - Astralite 10 Series Lamp (100kLux), Mobile, UK Plug Lead, Integral Emergency Backup Battery | 30.0kg |
| 5EXL/ALE10MTA | Minor Surgical & Examination Lighting - Astralite 10 Series Lamp (100kLux), Mobile, Telescopic Column, UK Plug Lead, Built in Power Supply Unit | 11.0kg |
| 5EXL/ALE10MTD | Minor Surgical & Examination Lighting - Astralite 10 Series Lamp (100kLux), Mobile, Telescopic Column, UK Plug Lead, Plug-Top Transformer | 11.0kg |

Minor Surgical & Examination Lighting - Astralite® AL10 Mobile, 70kLux

Features

- Full spectrum colour rendition, allows small differences to be easy to distinguish
- Fat beam illumination ensures high light intensity across the full illuminated area
- Red balance control provides enhanced visualisation of red tissues, & improved differentiation between tissues of similar colour
- The Astralite® warm / cold range ensures excellent visualisation of skin issues for all skin tones
- Astralite® HD-LED® provides 70,000 Lux output at 1 metre & offers a long life of >50,000 hours, equating to more than 20 years of normal use
- A large, illuminated area of 250mm diameter makes it easier to illuminate large areas of tissue & target light into the wound
- Easy to use controls...
 - Auto-on when any control is touched
 - Focusable beam by twisting the handle
 - Light intensity control (8 steps)
 - Adjustable colour by red balance control
- Ultra slim & light-weight lamp head enables smooth, fast & precise positioning during procedures
- The lamp head is mounted on arms with a multi-movement mechanism, allowing positioning within a wide envelope of movement
- Five rotations allow easy positioning of the light beam from any angle
- Uses less than 50 watts of power & with >50,000 hours of LED life, Astralite® HD-LED® saves money on energy & maintenance
- A five-star base allows the light to be easily positioned
- The lamp head is sealed to IP54 to protect from ingress of dirt fluids, whilst the use on anti-microbial & smooth surfaces allow for easy disinfection
- The lamp head is manoeuvred using a sterilisable handle (disposable handles are available as an option)
- Integral emergency backup battery provides 3hrs life (minimum)

Dimensions (w x d x h)

- 5EXL/AL10MO - 620 x 630 x 1608mm
- 5EXL/AL10MTA - 620 x 630 x 1608mm
- 5EXL/AL10MTD - 620 x 630 x 1608mm

Standard Colours

- White



5EXL/AL10MO

| Item | Description | Weight |
|--------------|--|--------|
| 5EXL/AL10MO | Minor Surgical & Examination Lighting - Astralite 10 Series Lamp (70kLux), Mobile, UK Plug Lead | 16.0kg |
| 5EXL/AL10MTA | Minor Surgical & Examination Lighting - Astralite 10 Series Lamp (70kLux), Mobile, Telescopic Column, UK Plug Lead, Built in Power Supply Unit | 11.0kg |
| 5EXL/AL10MTD | Minor Surgical & Examination Lighting - Astralite 10 Series Lamp (70kLux), Mobile, Telescopic Column, UK Plug Lead, Plug-Top Transformer | 11.0kg |

Examination Lighting - Coolview®, CLED23™ TX, Articulated Arm, Mobile, 60kLux

Features

- Coolview® CLED23™ provides 60,000 Lux output at 0.5 metre
- Light intensity can be altered through 4 easily selectable settings, providing a suitable level of intensity for all procedures
- A large, illuminated area of 210mm diameter makes it easy to examine large areas of tissue & makes it easier to target the light on the patient
- CLED23™ reproduces all of the visible colours naturally & accurately. The high Ra of 95 describes the exceptionally high quality of white light whilst the high R9 of 90 measurement describes how it accurately reproduces visible red
- CLED23™ allows the user to adjust the colour temperature of the light source, enhancing the clinician's ability to recognise & distinguish tissue conditions. The warm white (3,500°K) setting is ideal for dermatological examinations, whilst the daylight white setting (4,500°K) is ideal for the recognition of blood vessels
- The Coolview® CLED23™ light head has 360° rotation, allowing the user to position the light beam to suit any procedure, without any restrictive stops or twisted cables
- The examination light can be used to provide ambient room lighting by reflecting light from the ceiling, a feature often used in neonatal care to provide night lighting
- Uses less than 50 watts of power & with >30,000 hours of LED life, saves money on energy & maintenance
- The long, 1200mm arm reach ensures the powerful beam can be positioned all around the patient couch, allowing for 'head to toe' examination of the patient without the need for patient repositioning
- An innovative spring-based arm system ensures the light is positioned effortlessly, remains fixed in place & is maintenance-free
- A five-star base allows the light to be easily positioned
- The light head is sealed to IP20, protecting from ingress of dust & moisture
- The easy to use & ergonomic control pod allows all lighting to be adjusted with a simple press of a button

Dimensions (w x d x h)

- 5EXL/CLED23TXMP - 700 x 700 x 1600mm

Standard Colours

- White



| Item | Description | Weight |
|-----------------|---|--------|
| 5EXL/CLED23TXMP | Examination Lighting - Coolview CLED23 TX Series Lamp (60kLux), Articulated Arm, Mobile, UK Plug Lead | 8.6kg |

Examination Lighting - Coolview[®], CLED10[™] ST, Flexible Arm, Mobile, 50kLux

Features

- Coolview[®] CLED10[™] provides 50,000 Lux output at 0.5 metre
- A large, illuminated area of 180mm diameter makes it easy to examine large areas of tissue
- CLED10[™] reproduces all of the visible colours naturally & accurately. The high Ra of >93 describes the exceptionally high quality of white light whilst the high R9 of >90 measurement describes how it accurately reproduces visible red
- The colour corrected light source with a colour temperature of 4,400°K allows for accurate representation of tissues during examination
- The Coolview[®] CLED10[™] offers a 280° lamp head rotation with an ergonomic handle offering control of the light
- The flexible arm ensures positional accuracy and good durability. The sealed construction protects against contamination
- A five-star base allows the light to be easily positioned
- The light head is sealed to IP20, protecting from ingress of dust & moisture
- Uses less than 50 watts of power & with >30,000 hours of LED life, saves money on energy & maintenance

Dimensions (w x d x h)

- 5EXL/CLED10STMP - 700 x 700 x 1600mm

Standard Colours

- White



| Item | Description | Weight |
|-----------------|--|--------|
| 5EXL/CLED10STMP | Examination Lighting - Coolview CLED10 ST Series Lamp (50kLux), Flexible Arm, Mobile, UK Plug Lead | 8.6kg |

Examination Lighting - Coolview®, CLED30™ SH, Flexible Arm, Mobile, 30kLux

Features

- Coolview® CLED30™ provides 30,000 Lux output at 0.5 metre
- Ideal for general examination within GP consulting & examination rooms
- The bright white LED light renders skin tones realistically, essential for correct diagnosis
- The ergonomics of the head combined with the flexible, stable arm allows for light & effortless positioning. The sealed construction protects against contamination
- The colour corrected light source with a colour temperature of 4,400°K allows for accurate representation of tissues during examination
- A five-star base allows the light to be easily positioned
- The light head is sealed to IP20, protecting from ingress of dust & moisture
- Uses less than 50 watts of power & with >50,000 hours of LED life, saves money on energy & maintenance

Dimensions (w x d x h)

- 5EXL/CLED30SHM - 700 x 700 x 1600mm

Standard Colours

- White



| Item | Description | Weight |
|----------------|--|--------|
| 5EXL/CLED30SHM | Examination Lighting - Coolview CLED30 SH Series Lamp (30kLux), Flexible Arm, Mobile, UK Plug Lead | 9.1kg |

Examination Lighting - Coolview[®], CLED53 FX[™], Articulated Arm, Mobile, 50kLux

Features

- Coolview[®] CLED53[™] provides 50,000 Lux output at 0.5 metre
- Ideal for medical consultations & examinations in primary care & medical clinics
- The easily accessible & intuitive controls offer 5 levels of brightness
- The colour corrected light source can be adjusted between 3,300, 3,800 & 4,400°K providing the clinician with accurate representation & visualisation of the site under examination
- Coolview[®] CLED53[™] offers a high CRI Ra of ≥ 93 which describes the exceptionally high quality of white light & excellent overall rendition, whilst the high CRI R9 value of ≥ 90 can help to enhance visualization of areas where red is more predominant
- The spring balanced arm with the base rotation of 360° ensures smooth & easy positioning
- A five-star base allows the light to be easily positioned
- The light head is sealed to IP20, protecting from ingress of dust & moisture
- Uses less than 50 watts of power & with >50,000 hours of LED life, saves money on energy & maintenance

Dimensions (w x d x h)

- 5EXL/CLED53FXMP - 620 x 660 x 1600mm

Standard Colours

- White



| Item | Description | Weight |
|-----------------|---|--------|
| 5EXL/CLED53FXMP | Examination Lighting - Coolview CLED53 FX Series Lamp (50kLux), Articulated Arm, Mobile, UK Plug Lead | 8.8kg |

Examination Lighting - Coolview®, CLED50™ SX, Flexible Arm, Mobile, 50kLux

Features

- Coolview® CLED50™ provides 50,000 Lux output at 0.5 metre
- Ideal for medical consultations & examinations in primary care & medical clinics
- The easily accessible & intuitive controls offer 5 levels of brightness
- The colour corrected light source with a colour temperature of 4,400°K allows for accurate representation of tissue during examination
- Coolview® CLED50™ offers a high CRI Ra of > 93 which describes the exceptionally high quality of white light & excellent overall rendition, whilst the high CRI R9 value of > 90 can help to enhance visualization of areas where red is more predominant
- The SX arm with base rotation of 360° ensures smooth & easy movement with its enhanced, stable, flexible arm for precise positioning
- A five-star base allows the light to be easily positioned
- The light head is sealed to IP20, protecting from ingress of dust & moisture
- Uses less than 50 watts of power & with >50,000 hours of LED life, saves money on energy & maintenance

Dimensions (w x d x h)

- 5EXL/CLED50SXMP - 700 x 700 x 1600mm

Standard Colours

- White



| Item | Description | Weight |
|-----------------|--|--------|
| 5EXL/CLED50SXMP | Examination Lighting - Coolview CLED50 SX Series Lamp (50kLux), Flexible Arm, Mobile, UK Plug Lead | 8.8kg |

Illuminated Magnifier - Optica MDV Optimal Colour Magnifier, Articulated Arm, Mobile

Features

- Large magnifier diameter of 157mm combined with 1.9x (3.5dpt) magnification allows the user to focus on fine details through a large-scale view
- 6,500°K LEDs ensure less shadow formation and optimal colour rendering
- The exceptional Ra of >93 accurately displays the high quality of white light & the R9 value >90 describes how accurately the user can differentiate between red tissues
- Reinforced friction joints & an aluminium spring balanced arm allows a broad reach of up to 142cm without the lamp head drifting, allowing smooth handling for users to examine typically harder to reach places with ease
- A five-star base allows the light to be easily positioned
- The light head is sealed to IP20, protecting from ingress of dust & moisture
- Uses less than 50 watts of power, & with >50,000 hours of LED life, saves money on energy & maintenance
- A durable lens cover protects the magnifier lens from dust or potential scratches. Magnifiers can be a potential fire risk if left in direct sunlight

Dimensions (w x d x h)

- 5EXL/OPTICAMDVM - 700 x 700 x 1600mm

Standard Colours

- White



| Item | Description | Weight |
|-----------------|--|--------|
| 5EXL/OPTICAMDVM | Illuminated Magnifier - Optica MDV Optimal Colour Magnifier, Dimmable, 160mm 3.5 Diopter Lens, Articulated Arm, Mobile, UK Plug Lead | 9.6kg |

Illuminated Magnifier - Optica WDS Woods Light Magnifier, Articulated Arm, Mobile

Features

- Other Woods lights require the room to be completely darkened to use, yet due to powerful BLB LEDs within the WDS light, it can function without this
- Optica is an approved medical device, which means that it can be used for a wide range of applications, including...
 - Dermatology
 - Human medicine
 - Dentistry
 - Veterinary medicine
 - Monitoring sterilised products
- Large magnifier diameter of 157mm combined with 1.9x (3.5dpt) magnification allows the user to focus on fine details through a large-scale view
- 6,500°K LEDs ensure less shadow formation and optimal colour rendering
- The exceptional Ra of >93 accurately displays the high quality of white light & the R9 value >90 describes how accurately the user can differentiate between red tissues
- Reinforced friction joints & an aluminium spring balanced arm allows a broad reach of up to 142cm without the lamp head drifting, allowing smooth handling for users to examine typically harder to reach places with ease
- A five-star base allows the light to be easily positioned
- The light head is sealed to IP20, protecting from ingress of dust & moisture
- Uses less than 50 watts of power & with >50,000 hours of LED life, saves money on energy & maintenance
- A durable lens cover protects the magnifier lens from dust or potential scratches. Magnifiers can be a potential fire risk if left in direct sunlight

Dimensions (w x d x h)

- 5EXL/OPTICAWDSM - 700 x 700 x 1600mm

Standard Colours

- White

The Woods light uses UV to pick up on skin conditions that may be missed using a standard LED light, refer to the chart...

| Diagnosis Indication | Colour Indication |
|-----------------------------|--|
| Erythrasma | Red fluorescence |
| Microsporia | Weak green fluorescence |
| Favus | Bilious green fluorescence |
| Trichobacteriosis Axillaris | Yellow ochre coloured fluorescence |
| Pityriasis Vericolor | Yellow ochre coloured fluorescence |
| Tuberous Sclerosis | Blue-white fluorescence versus normal skin |
| Vitiligo | Blue-white fluorescence of depigmented areas |
| Scabies | Grey-white mite tracks |

| Item | Description | Weight |
|-----------------|---|--------|
| 5EXL/OPTICAWDSM | Illuminated Magnifier - Optica WDS Woods Light Magnifier, Dimmable, 160mm 3.5 Diopter Lens, Articulated Arm, Mobile, UK Plug Lead | 9.6kg |



Pharmacy & Vaccine Refrigeration



| | |
|--|----|
| Pharmacy & Vaccine Refrigeration | 50 |
| Advanced Pharmacy Refrigeration | 52 |
| Pharmacy & Vaccine Carriers - Portable | 53 |

Pharmacy & Vaccine Refrigerators - Under-Bench, Bench & Wall Mounting, Solid & Glass Doors



Features

- Compliant with the Department of Health Green Book
- Recommendations in the General Pharmaceutical Council Standards
- Royal College of Veterinary Surgeons Guidelines
- Designed specifically for the safe storage of vaccines & pharmaceuticals
- Available as bench top, under bench, wall fitting or free-standing
- Temperature range +2°C to +8°C
- Second wandering temperature probe (can be placed anywhere within the refrigerator, ideal for pharmacists needing to comply with MHRA regulations)
- IntelliCold® touch screen controller...
 - Automatic 24/7 temperature & fridge operation data recording (micro-SD card required)
 - Min / max temperature control, display & recording
 - Displays temperature from both probes
 - High / low temperature alarm
 - Door open alarm
 - Mains failure alarm (requires batteries)
 - Alarm battery back-up
- Internal light
- Access port & remote alarm contacts
- Fan assisted cooling
- Off cycle auto-defrost
- Low GWP environmentally friendly refrigerant
- Self-closing doors, with door open alarm
- Available with either...
 - CAM Lock - Supplied with two keys
 - Digital Push Button Lock - Programmable four-digit code
- Adjustable shelves
- Micro-SD card (optional)
- Full UKAS calibration service (optional)
- Repeat alarm (optional)

Standard Colours

- Exterior - White / Blue
- Interior - White



| CAM Lock | Digital Push Button | Description | Overall Dimensions (w x d x h) | Shelves | Weight |
|-------------------|---------------------|------------------------|--------------------------------|---------|--------|
| Solid Door | | | | | |
| 5RLDF0119 | 5RLDF0119DIGILOCK | Bench / Wall Mounting* | 450 x 510 x 538mm (36 Litres) | 2 | 30.0kg |
| 5RLDF0219 | 5RLDF0219DIGILOCK | Bench / Wall Mounting* | 450 x 510 x 740mm (66 Litres) | 3 | 34.0kg |
| 5RLDF0519 | 5RLDF0519DIGILOCK | Under Bench | 600 x 600 x 835mm (150 Litres) | 4 | 51.0kg |
| Glass Door | | | | | |
| 5RLDG0519 | 5RLDG0519DIGILOCK | Under Bench | 600 x 600 x 835mm (150 Litres) | 3 | 54.0kg |

*Integral Wall Mounting Brackets

5RLDF0219



Pharmacy & Vaccine Refrigerators - Freestanding, Solid & Glass Doors



Features

- Compliant with the Department of Health Green Book
- Recommendations in the General Pharmaceutical Council Standards
- Royal College of Veterinary Surgeons Guidelines
- Designed specifically for the safe storage of vaccines & pharmaceuticals
- Temperature range +2°C to +8°C
- Second wandering temperature probe (can be placed anywhere within the refrigerator, ideal for pharmacists needing to comply with MHRA regulations)
- IntelliCold® touch screen controller...
 - Automatic 24/7 temperature & fridge operation data recording (micro-SD card required)
 - Min / max temperature control, display & recording
 - Displays temperature from both probes
 - High / low temperature alarm
 - Door open alarm
 - Mains failure alarm (requires batteries)
 - Alarm battery back-up
- Internal light
- Access port & remote alarm contacts
- Fan assisted cooling
- Off cycle auto-defrost
- Low GWP environmentally friendly refrigerant
- Self-closing doors, Available with either...
 - CAM Lock - Supplied with two keys
 - Digital Push Button Lock - Programmable four-digit code
- Adjustable shelves
- Micro-SD card (optional)
- Full UKAS calibration service (optional)

Standard Colours

- Exterior - White / Blue
- Interior - White



5RLDF1019



5RLDG1019



5RLDG1519

| CAM Lock | Digital Push Button | Description | Overall Dimensions (w x d x h) | Shelves | Weight |
|-------------------|---------------------|---------------|---------------------------------|---------|---------|
| Solid Door | | | | | |
| 5RLDF1019 | 5RLDF1019DIGLOCK | Free Standing | 600 x 700 x 1510mm (340 Litres) | 6 | 79.0kg |
| 5RLDF1519 | 5RLDF1519DIGLOCK | Free Standing | 600 x 700 x 1875mm (440 Litres) | 6 | 93.0kg |
| Glass Door | | | | | |
| 5RLDG1019 | 5RLDG1019DIGLOCK | Free Standing | 600 x 700 x 1510mm (340 Litres) | 6 | 91.0kg |
| 5RLDG1519 | 5RLDG1519DIGLOCK | Free Standing | 600 x 700 x 1875mm (440 Litres) | 6 | 105.0kg |



Advanced Pharmacy Refrigerators - Freestanding, Solid & Glass Doors

CE

Features

- Compliant with the Department of Health Green Book
- Recommendations in the General Pharmaceutical Council Standards
- Royal College of Veterinary Surgeons Guidelines
- Designed specifically to provide close temperature control for temperature sensitive medicines in the pharmacy
- Temperature range +2°C to +8°C
- Precise microprocessor temperature control...
 - Digital temperature control & display
 - High / low temperature alarm
 - Door open alarm
- Internal lights
- Access port & remote alarm contacts (optional during manufacture)
- Fan assisted cooling
- Auto-defrost
- Low GWP environmentally friendly refrigerant
- Self-closing doors fitted with a CAM Lock - Supplied with two keys
- Hygienic stainless-steel interior
- Adjustable anti-tilt stainless-steel shelves (70kg capacity)
- Lockable castors
- Full UKAS calibration service (optional)

Standard Colours

- Exterior - White / Blue
- Interior - Stainless Steel
- Shelves - Stainless Steel



SRPFR21043



SRPFG44043

| CAM Lock | Description | Overall Dimensions (w x d x h) | Shelves | Weight |
|-------------------|---------------|-----------------------------------|---------|---------|
| Solid Door | | | | |
| SRPFR21043 | Free Standing | 710 x 800 x 1990mm (650 Litres) | 4 | 138.0kg |
| SRPFR44043 | Free Standing | 1420 x 800 x 1990mm (1300 Litres) | 8 | 215.0kg |
| Glass Door | | | | |
| SRPFG21043 | Free Standing | 710 x 800 x 1990mm (650 Litres) | 4 | 125.0kg |
| SRPFG44043 | Free Standing | 1420 x 800 x 1990mm (1300 Litres) | 8 | 195.0kg |



Pharmacy & Vaccine Carriers - Portable

Features

- Can be calibrated in accordance with the Department of Health Green Book
- Designed specifically for the safe transport of vaccines & pharmaceuticals (unsuitable for blood products)
- Temperature range +2°C to +10°C
- Supplied with two power leads...
 - Mains - 240-Volt DC
 - Vehicular - 12-Volt AC
- Lightweight & easily transportable
- Safe thermoelectric solid state cooling system
- Digital temperature display
- Easy digital temperature adjustment
- Tough plastic exterior, powder coated interior
- Divider to retain contents in place during transit
- Moulded feet for stability
- Shoulder strap
- Suitable for use with data loggers

Dimensions (w x d x h)

Internal Dimensions...

- 5RPDF0012F - 200 x 335 x 165mm
- 5RPDF0019F - 245 x 385 x 185mm

Standard Colours

- Exterior - Grey
- Interior - Black



5RPDF0012F



5RPDF0012F



5RPDF0019F



| Item | Description | Overall Dimensions (w x d x h) | Weight |
|------------|--|--------------------------------|--------|
| 5RPDF0012F | Refrigerated Pharmacy & Vaccine Carrier - Portable, 12 Litre | 430 x 295 x 295mm | 4.6kg |
| 5RPDF0019F | Refrigerated Pharmacy & Vaccine Carrier - Portable, 19 Litre | 465 x 320 x 355mm | 6.5kg |

Medical Measuring Systems & Scales



| | |
|-------------------------------------|-----|
| Baby Scales | 56 |
| Paediatric Measuring Systems | 64 |
| Flat Scales | 72 |
| Measuring Stations | 78 |
| Column Scales | 84 |
| Height Measuring Systems | 88 |
| Handrail Scales | 96 |
| Multifunctional & Wheelchair Scales | 98 |
| Chair Scales | 104 |
| ECG Machines | 108 |
| ECG Accessories | 114 |

Baby Scale - Flat Weighing Tray

Features

- Slimline design allows for drawer storage
- Allows measuring & weighing to be carried out in a single step (optional analogue length-measuring rod)
- Lightweight with a carrying handle to assist mobile use
- Easy to read large backlit LCD display
- Wide range of functions...
 - TARE
 - BMIF
 - HOLD
 - Auto-Hold
 - Auto weighing range switch-over
 - Damping
 - Automatic switch-off
 - Confirm button
- Battery powered (6 x AA)
- Graduation 5g < 10kg > 10g
- Capacity 20kg

Dimensions (w x d x h)

- Overall Dimensions - 650 x 308 x 110mm
- Tray - 645 x 290 x 40mm

Standard Colours

- White

Options / Accessories

- 5SE/232 N - Analogue Length-Measuring Rod
 - Allows weighing & measuring in one step
 - Integrated head & foot positioners
 - Durable aluminium scratch-resistant construction with easy-to-read markings
 - Measuring range - 35-80cm
 - Graduation - 1mm
- 5SE/428 - Carrying Case
- 5SE/402 - Trolley
- 5SE/403 - Trolley with Drawer & Shelf



5SE/336

Analogue Length-Measuring Rod - 5SE/232 N



| Item | Description | Weight |
|---------|---------------------------------|--------|
| 5SE/336 | Baby Scale - Flat Weighing Tray | 3.7kg |

Baby Scale - Extra Large Weighing Tray

Features

- Weighing tray with high side walls for increased safety
- Allows measuring & weighing to be carried out in a single step (optional analogue length measuring rod)
- Three-step damping for fast weighing
- Large tray is suitable for weighing toddlers while sitting

Functions...

- TARE
 - BMIF
 - HOLD
 - Auto-Hold
 - Automatic weighing range switch-over
 - Automatic switch-off
 - Confirm button
- Battery powered (6 x AA)
 - Graduation 5g < 7.5kg > 10g
 - Capacity 20kg

Dimensions (w x d x h)

- Overall Dimensions - 620 x 358 x 190mm
- Tray - 615 x 275 x 130mm

Standard Colours

- White

Options / Accessories

- 5SE/233 - Analogue Length-Measuring Rod
- 5SE/402 - Trolley
- 5SE/403 - Trolley with Drawer & Shelf



5SE/376

Shown with optional Analogue Length-Measuring Rod - 5SE/233



| Item | Description | Weight |
|---------|--|--------|
| 5SE/376 | Baby Scale - Extra Large Weighing Tray | 3.7kg |

Baby & Toddler Scale - 2-in-1, Mobile Baby & Flat Toddler, 20kg

Features

- Allows the weighing of babies lying down & toddlers standing up
- Compact, robust & lightweight, ideal for mobile use
- High-quality baby scale with calibration approval
- Level bubble & levelling feet for a perfect horizontal installation
- Approved by the Child Growth Foundation
- Functions...
 - TARE
 - BMIF
 - HOLD
 - Automatic switch-off
 - Weighing range switch-over
- Battery powered (6 x AA)
- Graduation 10g <10kg > 20g
- Capacity 20kg

Dimensions (w x d x h)

- Overall Dimensions - 552 x 364 x 164mm
- Tray - 525 x 250 x 87mm
- Platform - 280 x 235 x 77mm

Standard Colours

- White

Options / Accessories

- 5SE/413 - Carrying Case
- 5SE/431 - Backpack
- 5SE/402 - Trolley
- 5SE/403 - Trolley with Drawer & Shelf



5SE/384

Weighs toddlers standing up



| Item | Description | Weight |
|---------|---------------------------------------|--------|
| 5SE/384 | Baby & Toddler Scale - 2-in-1, Mobile | 2.8kg |

Approved by



Baby & Toddler Scale - 2-in-1, Mobile Baby & Flat Toddler, 50kg

Features

- Allows the weighing of babies lying down & toddlers standing up
- Compact, robust & lightweight, ideal for mobile use
- High-quality baby scale with calibration approval
- Level bubble & levelling feet for a perfect horizontal installation
- Approved by the Child Growth Foundation
- Functions...
 - TARE
 - BMIF
 - HOLD
 - Automatic switch-off
 - Weighing range switch-over
- Battery powered (6 x AA)
- Graduation 20g < 20kg > 50g
- Capacity 50kg

Dimensions (w x d x h)

- Overall Dimensions - 552 x 364 x 164mm
- Tray - 525 x 250 x 87mm
- Platform - 280 x 235 x 77mm

Standard Colours

- White

Options / Accessories

- 5SE/413 - Carrying Case
- 5SE/431 - Backpack
- 5SE/402 - Trolley
- 5SE/403 - Trolley with Drawer & Shelf



5SE/385

Scales with tray for weighing babies



| Item | Description | Weight |
|---------|---------------------------------------|--------|
| 5SE/385 | Baby & Toddler Scale - 2-in-1, Mobile | 2.8kg |

Approved by



Carrying Case (suitable for 5SE/336)

Features

- Allows for the transportation of flat weighing-tray scales
- Water resistant nylon with an adjustable shoulder strap & handle

Dimensions (w x d x h)

- Overall Dimensions - 650 x 10 x 320mm

Standard Colours

- Black



5SE/428

Provides convenient and comfortable transport with adjustable shoulder strap

| Item | Description | Weight |
|---------|---------------|--------|
| 5SE/428 | Carrying Case | 1.2kg |

Carrying Case (suitable for 5SE/384 & 5SE/385)

Features

- Allows for the transportation of 2-in-1, mobile baby & flat toddler scales
- Water resistant nylon with padded shoulder straps & a handle

Dimensions (w x d x h)

- Overall Dimensions - 570 x 330 x 150mm

Standard Colours

- Black



5SE/413

| Item | Description | Weight |
|---------|---------------|--------|
| 5SE/413 | Carrying Case | 0.9kg |

Backpack (suitable for 5SE/384 & 5SE/385)

Features

- Allows for the transportation of 2-in-1, mobile baby & flat toddler scales
- Water resistant nylon with padded shoulder straps & a handle

Dimensions (w x d x h)

- Overall Dimensions - 380 x 170 x 580mm

Standard Colours

- Black



5SE/431

Complete with cushioned shoulder straps



| Item | Description | Weight |
|---------|-------------|--------|
| 5SE/431 | Backpack | 0.8kg |

Trolley (suitable for 5SE/336, 5SE/376, 5SE/384 & 5SE/385)

Features

- Allows for safe & routine use of scales in hospitals & medical practices
- Specific indentations in the worksurface allows the base of the scale to be positively positioned, ensuring that it does not slip
- Extruded aluminium
- Push-handle one end
- Polyurethane ring buffers offer protection to both the trolley & fabric of the building
- 100mm pressed steel castors, 2 off braking

Dimensions (w x d x h)

- Overall Dimensions - 715 x 435 x 800mm

Options / Accessories

- 5SE/408 - Paper Roll Holder



Polyurethane ring buffers offer protection to both the trolley & fabric of the building



| Item | Description | Weight |
|---------|-------------|--------|
| 5SE/402 | Trolley | 11.5kg |

Trolley - Drawer & Shelf (suitable for 5SE/336, 5SE/376, 5SE/384 & 5SE/385)

Features

- Allows for safe & routine use in hospitals & medical practices
- Specific indentations in the worksurface allows the base of the scale to be positively positioned, ensuring that it does not slip
- Lower drawer & shelf
- Aluminium extrusion construction
- Push-handle one end
- Polyurethane ring buffers offer protection to both the trolley & fabric of the building
- 100mm pressed steel castors, 2 off braking

Dimensions (w x d x h)

- Overall Dimensions - 715 x 435 x 800mm

Options / Accessories

- 5SE/408 - Paper Roll Holder



Specific indentations in the worksurface allows the base of the scale to be positively positioned, ensuring that it does not slip



| Item | Description | Weight |
|---------|--------------------------|--------|
| 5SE/403 | Trolley - Drawer & Shelf | 27.5kg |

Infantometer for Measuring Babies & Toddlers

Features

- Trough-shaped measuring surface ensures correct lying position
- Measurement scale printed along top side for easy reading
- Foot positioner runs on two rails, a brake button ensures that it cannot be moved by the baby
- Measuring range - 33-100cm
- Graduation - 1mm

Dimensions (w x d x h)

- Overall Dimensions - 1105 x 402 x 165mm

Standard Colours

- White



5SE/416

Trough-shaped measuring surface ensures
correct lying position

| Item | Description | Weight |
|---------|--|--------|
| 5SE/416 | Infantometer for Measuring Babies & Toddlers | 3.8kg |

Measuring Board - Folding

Features

- Lightweight & folding for mobile use
- Foot positioner runs on a sliding rail
- Measurement scale printed along top side for easy reading
- Foot positioner runs on two rails, a brake button ensures that it cannot be moved by the baby
- Measuring range - 10-100cm
- Graduation - 1mm

Dimensions (w x d x h)

- Overall Dimensions - 1109 x 333 x 115mm

Standard Colours

- White


Options / Accessories

- 5SE/412 - Carrying Case



5SE/417

Foot positioner runs on a sliding rail

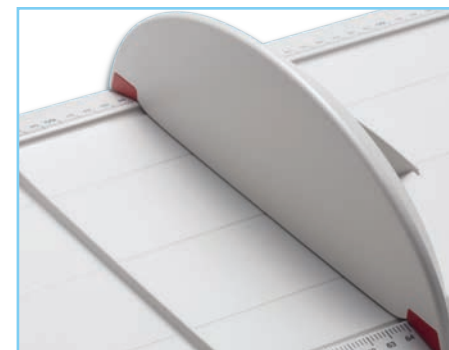

| Item | Description | Weight |
|---------|---------------------------|--------|
| 5SE/417 | Measuring Board - Folding | 1.6kg |

Measuring Mat - Roll Type

Features


- Lightweight & rolls for mobile use
- Fixed head piece & sliding foot positioner allows for simple use
- Measuring range - 10-99cm
- Graduation - 5mm

Dimensions (w x d x h)

- Overall Dimensions - 1250 x 300 x 140mm

Standard Colours

- White

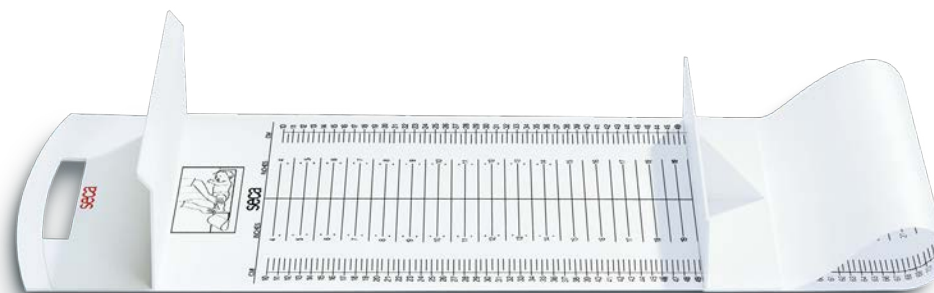

5SE/210

Fixed head piece & sliding foot positioner

| Item | Description | Weight |
|---------|---------------------------|--------|
| 5SE/210 | Measuring Mat - Roll Type | 0.58kg |

Measuring Rod - Large Calipers

Features


- Fixed headpiece & smooth sliding foot positioner
- Can be attached to a table or wall (fixings not supplied)
- Calipers fold for space saving & to transport
- Measuring range - 7-99cm
- Graduation - 1mm

Dimensions (w x d x h)

- Overall Dimensions - 1042 x 288 x 120mm
- Folded Dimensions - 1042 x 35 x 120mm

Standard Colours

- White

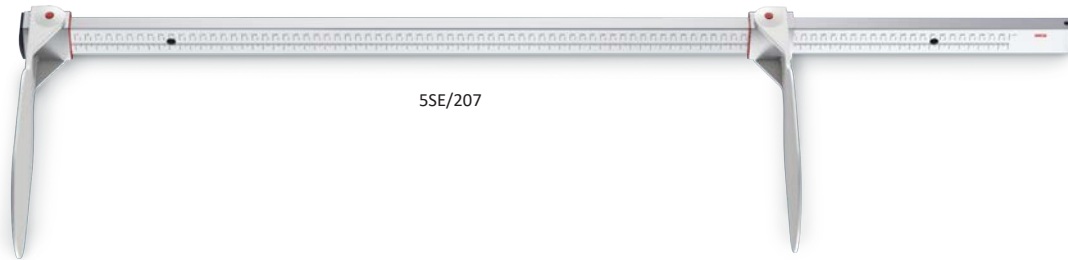

5SE/207

Fixed headpiece & smooth sliding foot positioner



| Item | Description | Weight |
|---------|--------------------------------|--------|
| 5SE/207 | Measuring Rod - Large Calipers | 0.81kg |

Measuring Tape - Head Circumference (x 15 tapes)

Features


- Hygienic, disposable non-stretch Teflon™ disposable measuring tape
- Allows two functions...
 - Front Side - Head circumference
 - Rear Side - Facial symmetry
- Easy-to-read, colour-coded graduations
- Practical dispenser (15 tapes)
- Measuring range - 3-59cm
- Graduation - 1mm

Dimensions (d x h)

- Overall Dimensions - 25 x 663mm

Standard Colours

- White

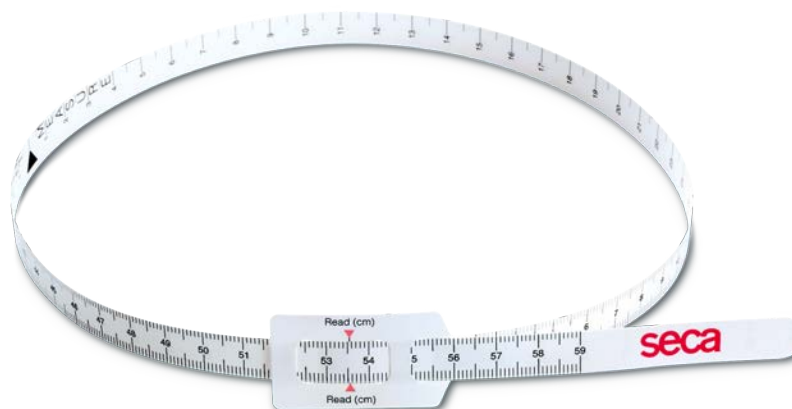

5SE/212

| Item | Description | Weight |
|---------|--|--------|
| 5SE/212 | Measuring Tape - Head Circumference (x 15 tapes) | 0.1kg |

Measuring Tape - Head Circumference, Waist-To-Hip-Ratio Calculator

Features

- Retractable measuring tape for precise body measurements
- WHR calculator for quick determination of body fat distribution
- WHR scale of metal for long life
- Easy-to-read graduations
- Measuring range - 0-205cm
- Graduation - 1mm

Dimensions (w x d x h)

- Overall Dimensions - 70 x 66 x 28cm



5SE/203

| Item | Description | Weight |
|---------|--|--------|
| 5SE/203 | Measuring Tape - Head Circumference, Waist-to-Hip-Ratio Calculator | 0.07kg |

Measuring Tape - Head Circumference, Ergonomic

Features

- Retractable measuring tape for precise body measurements
- Easy-to-read graduations
- Convenient one-handed operation
- Compact & easy to store
- Measuring range - 0-205cm
- Graduation - 1mm

Dimensions (w x d x h)

- Overall Dimensions - 70 x 66 x 22cm



| Item | Description | Weight |
|---------|--|--------|
| 5SE/201 | Measuring Tape - Head Circumference, Ergonomic | 0.05kg |

Carrying Case (suitable for 5SE/417)

Features

- Allows for the transportation of the folding measuring board
- Water resistant nylon with an adjustable shoulder strap & handle

Dimensions (w x d x h)

- Overall Dimensions - 686 x 56 x 427mm

Standard Colours

- Black



5SE/412

| Item | Description | Weight |
|---------|-----------------------------|--------|
| 5SE/412 | Carrying Case - for 5SE/417 | 0.65kg |

Flat Scale - EMR-Validated, Extra-Large Platform, Cable Remote Display

Features

- NAWI approved class III
- Extra-large platform
- Cable remote display for wall mounting or table installation
- BMI calculator & three-stage damping
- Slip-proof rubber surface
- Wide range of functions...
 - TARE
 - Pre-TARE
 - HOLD
 - Auto-HOLD
 - Auto-CLEAR
 - RESET
 - Automatic Switch-Off
 - Automatic Weighing Range Switch-Over
 - Adjustable Damping
 - BMI
- Battery powered (6 x AA)
- Graduation 100g < 200kg > 200g
- Capacity 300kg

Dimensions (w x d x h)

- Overall Dimensions - 640 x 600 x 55mm
- Platform Dimensions - 560 x 560 x 55mm



5SE/635

| Item | Description | Weight |
|---------|--|--------|
| 5SE/635 | Flat Scale - EMR-Validated, Extra-Large Platform, Cable Remote Display | 14.4kg |



Flat Scale - Cable Remote Display

Features

- NAWI approved class III
- Extra-large platform
- Cabled remote display for wall mounting or table installation
- Levelling feet for stability
- Slip-proof knotted rubber surface
- Integrated handle
- Approved by the Child Growth Foundation
- Functions...
 - TARE
 - HOLD
 - Automatic Switch-Off
 - BMI
- Battery powered (6 x AA)
- Graduation 100g < 150kg > 200g
- Capacity 200kg

Dimensions (w x d x h)

- Overall Dimensions - 321 x 356 x 60mm
- Platform Dimensions - 288 x 278 x 60mm

Options / Accessories

- 5SE/421 - Carrying Case



5SE/899

Cable remote display for wall mounting or table installation



| Item | Description | Weight |
|---------|-----------------------------------|--------|
| 5SE/899 | Flat Scale - Cable Remote Display | 4.2kg |

Approved by



Flat Scale - Mother & Child Function

Features

- NAWI approved class III
- Mother & child function allows for the weighing of toddlers
- Levelling feet for strong stability while cradled on the mother's or father's arm
- Slip-proof knotted rubber surface
- Functions...
 - Tap-On, Automatic Switch On
 - Automatic Switch-Off
 - Mother & Child Function
- Battery powered (6 x AA)
- Graduation 100g < 150kg > 200g
- Capacity 200kg

Dimensions (w x d x h)


- Overall Dimensions - 321 x 356 x 60mm
- Platform Dimensions - 288 x 278 x 60mm

Options / Accessories

- S5E/415 - Carrying Case



5SE/877

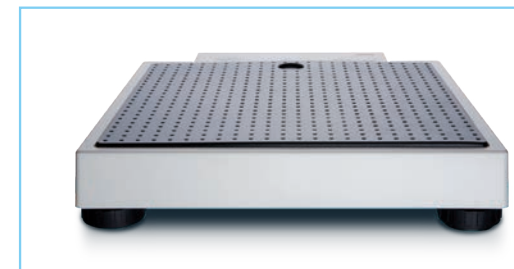

| Item | Description | Weight |
|---------|--------------------------------------|--------|
| S5E/877 | Flat Scale - Mother & Child Function | 3.9kg |

Flat Scale - Mobile Use

Features

- NAWI approved class III
- Slip-proof knotted rubber surface
- Functions...
 - Tap-On, Automatic Switch-On
 - Automatic Switch-Off
- Battery powered (6 x AA)
- Graduation 100g < 100kg > 200g
- Capacity 200kg

Dimensions (w x d x h)

- Overall Dimensions - 321 x 356 x 60mm
- Platform Dimensions - 288 x 280 x 60mm

Options / Accessories

- 5SE/415 - Carrying Case



5SE/875

| Item | Description | Weight |
|---------|-------------------------|--------|
| 5SE/875 | Flat Scale - Mobile Use | 3.9kg |

Carrying Case (suitable for 5SE/875 & 5SE/877)

Features

- Allows for the transportation of flat weighing tray scales
- Water resistant nylon with an adjustable shoulder strap

Dimensions (w x d x h)

- Overall Dimensions - 330 x 70 x 380mm

Standard Colours

- Black



5SE/415

| Item | Description | Weight |
|---------|---------------|--------|
| 5SE/415 | Carrying Case | 0.8kg |

Flat Scale - Mechanical, Large Dial

Features

- NAWI approved class IIII
- Large, easy to read dial
- Extremely robust, precise & reliable
- Corrosion resistant inside & outside
- Slip-proof knotted rubber surface
- Graduation 1kg
- Capacity 150kg

Dimensions (w x d x h)

- Overall Dimensions - 303 x 470 x 118 mm
- Platform Dimensions - 270 x 280 x 70mm



5SE/761

Clip fixation system for easy rubber mat exchange



| Item | Description | Weight |
|---------|-------------------------------------|--------|
| 5SE/761 | Flat Scale - Mechanical, Large Dial | 3.5kg |

Carrying Case (suitable for 5SE/899)

Features

- Allows for the transportation of flat weighing tray scales
- Water resistant nylon with an adjustable shoulder strap

Dimensions (w x d x h)

- Overall Dimensions - 430 x 130 x 350mm

Standard Colours

- Black



5SE/421

| Item | Description | Weight |
|---------|-----------------------------|--------|
| 5SE/421 | Carrying Case - for 5SE/899 | 0.8kg |

Measuring Station - EMR-Validated, Handrail, ID Display, Ultrasonic Height Measurement & Voice Guidance

Features

- Large bearclaw glass platform for absolute breakage resistance & perfect hygiene
- Handrail provides stability support
- Illuminated LED footprints in the weighing platform show patients the correct standing position for accurate height measurement
- ID display with touchscreen
- Voice guidance to support the measurement process
- Ultrasound technology provides precise & high-speed measuring
- EMR-validated, transmits measured data directly to an electronic medical record system or printer
- Wide range of functions...
 - Display of User & Patient Name or ID
 - Display Date of Birth Parent
 - TARE
 - Pre-TARE
 - HOLD
 - Auto-HOLD
 - CLEAR
 - Auto-CLEAR
 - RESET
 - Automatic Weighing Range Switch-Over
 - Adjustable Damping
 - Auto-BMI
 - Auto-BSA (Body Surface Area)
 - Mother & Child Function
 - Standby Mode
 - SEND/Auto-SEND
 - Wi-Fi
 - Ethernet
 - Confirm Button
 - Acoustic signals can be activated
 - Customizable shortcut buttons
 - Backlighting
- Power adaptor
- Robust rubber wheels assist transportation
- Measuring range - 100-220cm
- Graduation - 1mm
- Graduation 50g < 150kg > 100g
- Capacity 300kg

Dimensions (w x d x h)

- Overall Dimensions - 801 x 650 x 2387mm
- Platform Dimensions - 600 x 467 x 70mm

Options / Accessories

- 5SE/459 - Panda Bear Bao Chao



5SE/655-HR-US

Ultrasonic height measurement



Handrail



| Item | Description | Weight |
|---------------|---|--------|
| 5SE/655-HR-US | Measuring Station - EMR-Validated, Handrail, ID Display, Ultrasonic Height Measurement & Voice Guidance | 29.0kg |



Measuring Station - EMR-Validated, ID Display, Ultrasonic Height Measurement & Voice Guidance

Features

- Large bearclaw glass platform for absolute breakage resistance & perfect hygiene
- Illuminated LED footprints in the weighing platform show patients the correct standing position, for accurate height measurement
- ID display with touchscreen
- Voice guidance to support the measurement process
- Ultrasound technology provides precise & high-speed measuring
- EMR-validated, transmits measured data directly to an electronic medical record system or printer
- Wide range of functions...
 - Display of User & Patient Name or ID
 - Display Date of Birth Parent
 - TARE
 - Pre-TARE
 - HOLD
 - Auto-HOLD
 - CLEAR
 - Auto-CLEAR
 - RESET
 - Automatic Weighing Range Switch-Over
 - Adjustable Damping
 - Auto-BMI
 - Auto-BSA (Body Surface Area)
 - Mother & Child Function
 - Standby Mode
 - SEND/Auto-SEND
 - Wi-Fi
 - Ethernet
 - Confirm Button
 - Acoustic signals can be activated
 - Customizable shortcut buttons
 - Backlighting
- Power adaptor
- Robust rubber wheels assist transportation
- Measuring range - 60-220cm
- Graduation - 1mm
- Graduation 50g < 150kg > 100g
- Capacity 300kg

Dimensions (w x d x h)

- Overall Dimensions - 600 x 614 x 2387mm
- Platform Dimensions - 600 x 467 x 70mm

Options / Accessories

- SSE/459 - Panda Bear Bao Bao



SSE/655-US

Optional animal sticker for children - SSE/487 (see page 283)



| Item | Description | Weight |
|------------|---|--------|
| SSE/655-US | Measuring Station - EMR-Validated, ID Display, Ultrasonic Height Measurement & Voice Guidance | 22.0kg |



Measuring Station - EMR-Validated, Handrail & ID Display

Features

- Large bearclaw glass platform for absolute breakage resistance & perfect hygiene
- Handrail provides stability support
- ID display with touchscreen
- EMR-validated, transmits measured data directly to an electronic medical record system or printer
- Wide range of functions...
 - Display of User & Patient Name or ID
 - Display Date of Birth Parent
 - TARE
 - Pre-TARE
 - HOLD
 - Auto-HOLD
 - CLEAR
 - Auto-CLEAR
 - RESET
 - Automatic Weighing Range Switch-Over
 - Adjustable Damping
 - BMI
 - Mother & Child Function
 - Standby Mode
 - Wi-Fi
 - Ethernet
 - Confirm Button
 - Acoustic signals can be activated
 - Customizable shortcut buttons
 - Backlighting
- Power adaptor
- Robust rubber wheels assist transportation
- Graduation 50g < 150kg > 100g
- Capacity 300kg

Dimensions (w x d x h)

- Overall Dimensions - 801 x 653 x 1280mm
- Platform Dimensions - 600 x 467 x 70mm

Options / Accessories

- 5SE/459 - Panda Bear Bao Bao



5SE/655-HR

| Item | Description | Weight |
|------------|--|--------|
| 5SE/655-HR | Measuring Station - EMR-Validated, Handrail & ID Display | 25.0kg |



Measuring Station - EMR-Validated, Touchscreen Display, Ultrasonic Height Measurement & Voice Guidance

Features

- Safety glass platform for perfect hygiene
- ID display with touchscreen
- Voice guidance to support the measurement process
- Ultrasound technology provides precise & high-speed measuring
- EMR-validated, transmits measured data directly to an electronic medical record system or printer
- Wide range of functions...
 - Pre-TARE
 - HOLD
 - Auto-HOLD
 - CLEAR
 - Auto-CLEAR
 - RESET
 - Automatic Weighing Range Switch-Over
 - Adjustable Damping
 - Auto-BMI
 - Mother & Child Function
 - BFR (Body-Fat-Rate)
 - User-defined zero setting
 - SEND/Auto-SEND
 - Patient data input
 - Acoustic signals can be activated
 - Backlighting
- Power adaptor
- Robust rubber wheels assist transportation
- Measuring range - 60-210cm
- Graduation - 1mm
- Graduation 50g < 150kg > 100g
- Capacity 300kg

Dimensions (w x d x h)

- Overall Dimensions - 434 x 466 x 2270mm
- Platform Dimensions - 430 x 365 x 60mm

Options / Accessories

- SSE/459 - Panda Bear Bao Bao



SSE/287

| Item | Description | Weight |
|---------|--|--------|
| SSE/287 | Measuring Station - EMR-Validated, Touchscreen Display, Ultrasonic Height Measurement & Voice Guidance | 16.5kg |



Measuring Station - EMR-Validated, Touchscreen Display, Height & Weight

Features

- Safety glass platform with a heel positioner for exact three-point measurement
- Precise head alignment by the Frankfurt line positioner
- Display in the headpiece shows the height
- Three-line touchscreen for simultaneous weight, height & BMI display
- EMR-validated, transmits measured data directly to an electronic medical record system or printer
- Wide range of functions...
 - Pre-TARE
 - HOLD
 - Auto-HOLD
 - CLEAR
 - Auto-CLEAR
 - RESET
 - Automatic Weighing Range Switch-Over
 - Calibration / Automatic Calibration
 - Adjustable Damping
 - Auto-BMI
 - Mother & Child Function
 - BFR (Body-Fat-Rate)
 - User-defined zero setting
 - SEND/Auto-SEND
 - Patient data input
 - Acoustic signals can be activated
 - Backlighting
- Power adaptor
- Batteries for headpiece (4 x AA)
- Robust rubber wheels assist transportation
- Measuring range - 30-220cm
- Graduation - 1mm
- Graduation 50g < 150kg > 100g
- Capacity 300kg

Dimensions (w x d x h)

- Overall Dimensions - 434 x 466 x 2394mm
- Platform Dimensions - 430 x 466 x 60mm

Options / Accessories

- 5SE/459 - Panda Bear Bao Bao



5SE/285

| Item | Description | Weight |
|---------|---|--------|
| 5SE/285 | Measuring Station - EMR-Validated, Touchscreen Display, Height & Weight | 16.0kg |



Panda Bear Bao Bao (suitable for measuring stations & column scales)

Features

- Makes the measuring process more appealing & child friendly
- Quick & easy installation
- Easy to clean, with rounded edges

Dimensions (w x d x h)

- Overall Dimensions - 380 x 44 x 670mm



5SE/459 shown with
5SE/704S (scales not included)

| Item | Description | Weight |
|---------|--------------------|--------|
| 5SE/459 | Panda Bear Bao Bao | 0.5kg |

Animal Stickers (suitable for scale-up line)

Features

- Makes the measuring process more appealing & child friendly
- Animal figures at eye-level help obtain a correct head position for height measurement
- Quick & easy self-adhesive installation


Dimensions (w x d x h)

- Overall Dimensions - 60 x 0.5 x 2346mm



5SE/487 shown with
5SE/655-US (scales not included)

| Item | Description | Weight |
|---------|-----------------|--------|
| 5SE/487 | Animal Stickers | 0.2kg |

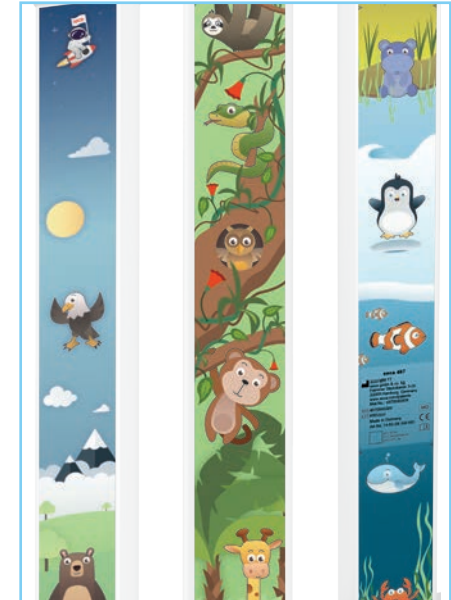

Column Scale - EMR-Validated, Stadiometer

Features

- Non-tilting base made of heavy duty cast iron
- Impact & scratch-resistant powder coating
- Height measuring rod with a heel plate is ideal for three-point measurement for patients specifically affected by obesity
- Display faces the user for increased visual ergonomics
- EMR-validated, transmits measured data directly to an electronic medical record system or printer
- Wide range of functions...
 - TARE
 - Pre-TARE
 - HOLD
 - Auto-HOLD
 - Auto-CLEAR
 - RESET
 - Automatic Switch-Off
 - Automatic Weighing Range Switch-Over
 - Adjustable Damping
 - BMI
 - Mother & Child Function
- Battery powered (6 x AA)
- Measuring range - 6-230cm
- Graduation - 1mm
- Graduation 50g < 150kg > 100g
- Capacity 300kg

Dimensions (w x d x h)

- Overall Dimensions - 360 x 520 x 1408mm
- Platform Dimensions - 335 x 345 x 80mm

Options / Accessories

- 5SE/459 - Panda Bear Bao Bao



5SE/704S

| Item | Description | Weight |
|----------|---|--------|
| 5SE/704S | Column Scale - EMR-Validated, Stadiometer | 17.6kg |



Column Scale - EMR-Validated

Features


- Non-tilting base made of heavy duty cast iron
- Impact & scratch-resistant powder coating
- Display faces the user for increased visual ergonomics
- EMR-validated, transmits measured data directly to an electronic medical record system or printer
- Wide range of functions...
 - TARE
 - Pre-TARE
 - HOLD
 - Auto-HOLD
 - Auto-CLEAR
 - RESET
 - Automatic Switch-Off
 - Automatic Weighing Range Switch-Over
 - Adjustable Damping
 - BMI
 - Mother & Child Function
 - SEND/Auto-SEND
- Battery powered (6 x AA)
- Robust rubber wheels assist transportation
- Graduation 50g < 150kg > 100g
- Capacity 300kg

Dimensions (w x d x h)

- Overall Dimensions - 360 x 520 x 930mm
- Platform Dimensions - 335 x 345 x 80mm

Options / Accessories

- 5SE/220 - Telescopic Measuring Rod
- 5SE/459 - Panda Bear Bao Bao

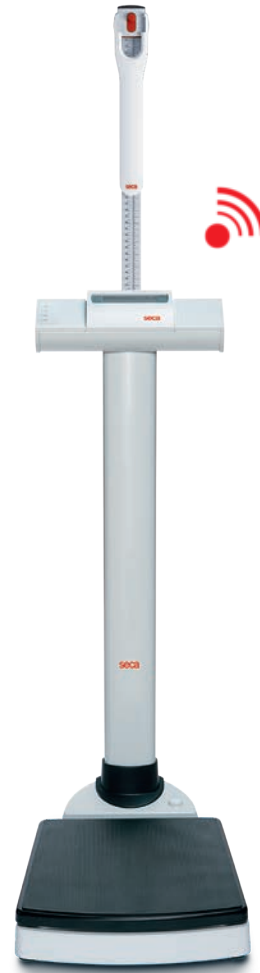

5SE/704

| Item | Description | Weight |
|---------|------------------------------|--------|
| 5SE/704 | Column Scale - EMR-Validated | 14.9kg |



Column Scale - Digital, BMI Function

Features

- Robust, compact column size
- Impact & scratch-resistant powder coating
- Display faces the user for increased visual ergonomics
- Wide range of functions...
 - TARE
 - HOLD
 - Automatic Switch-Off
 - Weighing Range Switch-Over
 - BMI
- Battery powered (6 x AA)
- Robust rubber wheels assist transportation
- Graduation 100g < 150kg > 200g
- Capacity 200kg

Dimensions (w x d x h)

- Overall Dimensions - 294 x 417 x 831mm
- Platform Dimensions - 294 x 274 x 75mm

Options / Accessories

- 5SE/220 - Telescopic Measuring Rod



5SE/799

Shown with optional measuring rod 5SE/220

| Item | Description | Weight |
|---------|--------------------------------------|--------|
| 5SE/799 | Column Scale - Digital, BMI Function | 6.3kg |

Telescopic Measuring Rod (suitable for 5SE/704 & 5SE/799)

Features

- Durable aluminium rod
- Easy-to-read, colour-coded graduations
- Measuring range - 60-200cm
- Graduation - 1mm

Dimensions (w x d x h)

- Overall Dimensions - 57 x 286 x 1480mm



5SE/220



| Item | Description | Weight |
|---------|--------------------------|--------|
| 5SE/220 | Telescopic Measuring Rod | 0.7kg |

Height Measuring System - Freestanding Stadiometer, Digital Display

Features

- Free-standing, allows positioning anywhere in the room
- Digital height measurement
- Precise head alignment using the Frankfurt line positioner
- High-quality glass platform with heel plate
- Levelling feet provide a very stable base
- Includes heel positioner for ideal three-point measurement
- Wide range of functions...
 - HOLD
 - RESET
 - Automatic Switch-Off
 - CM/Inch Switch-Over
 - Calibration / Automatic Calibration
 - User-Defined Zero Setting
 - Acoustic Signals Can Be Activated
 - Backlighting
- Battery powered (4 x AA)
- Robust rubber wheels assist transportation
- Measuring range - 30-220cm
- Graduation - 1mm

Dimensions (w x d x h)

- Overall Dimensions - 434 x 466 x 2394mm
- Platform Dimensions - 430 x 365 x 60mm



5SE/274

| Item | Description | Weight |
|---------|---|--------|
| SSE/274 | Height Measuring System - Freestanding Stadiometer, Digital Display | 15.0kg |


Height Measuring System - Wall-Mounted Stadiometer, Display on the Headpiece

Features

- Wall mounting, allowing stable & wobble-free height measurement
- Digital height measurement
- Precise head alignment using the Frankfurt line positioner
- Headpiece with a backlit digital display for easy reading
- Non-slip rubber mat with heel positioner
- Includes heel positioner for ideal three-point measurement
- Wide range of functions...
 - HOLD
 - RESET
 - Automatic Switch-Off
 - CM/Inch Switch-Over
 - Calibration / Automatic Calibration
 - User-Defined Zero Setting
 - Acoustic Signals Can Be Activated
 - Backlighting
- Battery powered (4 x AA)
- Measuring range - 30-220cm
- Graduation - 1mm

Dimensions (w x d x h)

- Overall Dimensions - 428 x 474 x 2318mm
- Platform Dimensions - 474 x 370 x 3mm

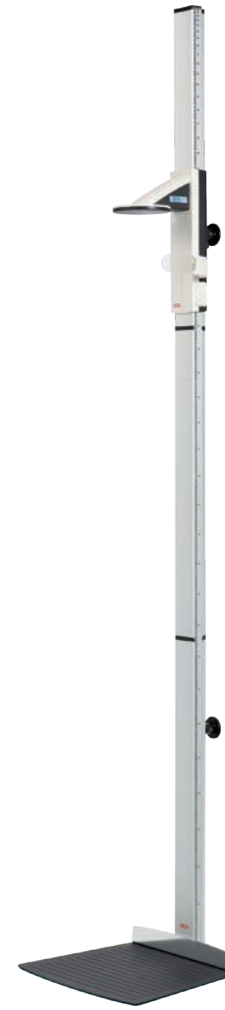

5SE/264

Non-slip rubber mat with heel positioner



| Item | Description | Weight |
|---------|--|--------|
| 5SE/264 | Height Measuring System - Wall-Mounted Stadiometer, Display on the Headpiece | 5.0kg |


Height Measuring System - Portable Stadiometer, Flat Scale

Features

- Can be connected to a mobile measuring station with a flat scale
- Robust platform for stability
- Includes heel positioner for optimal three-point height measurement
- Easy to read scale, printed on the side & viewable through the reading window
- Wall spacer for additional stability
- Measuring rod can be dismantled & stored securely in the base for easy transport
- Measuring range - 20-205cm
- Graduation - 1mm

Dimensions (w x d x h)

- Overall Dimensions - 328 x 574 x 2145mm

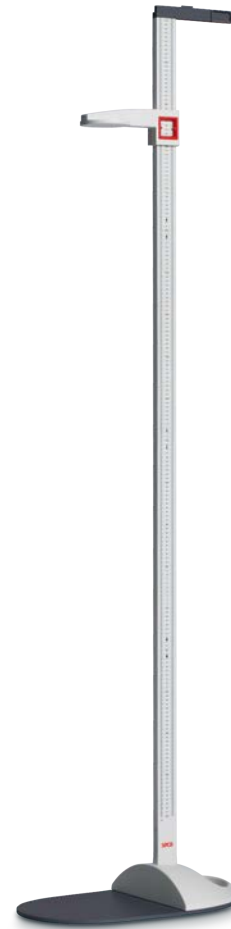

5SE/217

| Item | Description | Weight |
|---------|--|--------|
| 5SE/217 | Height Measuring System - Portable Stadiometer, Flat Scale | 3.6kg |

Height Measuring System - Portable Stadiometer

Features

- Simple & easy to set-up, no wall fastening necessary
- Large floor plate ensures stability
- Includes heel positioner for ideal three-point measurement
- Easy to read scale, printed on the side & viewable through the reading window
- Wall spacer for additional stability
- Measuring rod can be dismantled & stored securely in the base for easy transport
- Approved by the Child Growth Foundation
- Measuring range - 20-205cm
- Graduation - 1mm

Dimensions (w x d x h)

- Overall Dimensions - 337 x 590 x 2165mm
- Folded Dimensions - 624 x 337 x 177mm



SSE/213

Approved by



| Item | Description | Weight |
|---------|--|--------|
| SSE/213 | Height Measuring System - Portable Stadiometer | 2.4kg |

Height Measuring System - Telescopic Measuring Rod, Large Measuring Range

Features

- Designed for wall mounting (fixings not supplied)
- Abrasion-resistant side printing for ease of reading
- Extra wide head gauge
- Includes heel positioner for ideal three-point measurement
- Durable aluminium measuring rod
- Measuring range - 6-230cm
- Graduation - 1mm

Dimensions (w x d x h)

- Overall Dimensions - 308 x 286 x 2320mm
- Folded Dimensions - 37 x 308 x 1325mm



5SE/222

| Item | Description | Weight |
|---------|---|--------|
| 5SE/222 | Height Measuring System - Telescopic Measuring Rod, Large Measuring Range | 1.1kg |

Height Measuring System - Measuring Rod, Children & Adults

Features

- Allows for a flexible measuring range
- Easy-to-read measurement scale
- Adjustable head positioner
- Choice of two units of measurement
- Simple assembly
- Measuring range - maximum 138cm, selectable from 3.5-230cm
- Graduation - 1mm

Dimensions (w x d x h)

- Overall Dimensions - 120 x 217 x 1500mm



5SE/216

| Item | Description | Weight |
|---------|--|--------|
| 5SE/216 | Height Measuring System - Measuring Rod, Children & Adults | 1.7kg |

Height Measuring System - Rolling Measuring Tape, Wall Mounting

Features

- Space-saving, roll-up mechanism
- Simple read-out of results through display window
- Durable tape, made of metal
- Measuring range - 0-220cm
- Graduation - 1mm

Dimensions (w x d x h)

- Overall Dimensions - 125 x 125 x 173mm



5SE/206

| Item | Description | Weight |
|---------|---|--------|
| 5SE/206 | Height Measuring System - Rolling Measuring Tape, Wall Mounting | 0.2kg |

Height Measuring System - Disposable Measuring Tape, Including Wall Dispenser

Features

- Extra space is provided to write down patient's name, height, weight and date
- Easily accessible from exclusive wall dispenser
- Measuring tape is ready to use for immediate use
- Disposable measuring tape made of high-quality paper can reduce cross-contamination of germs



5SE/218

| Item | Description |
|---------|---|
| 5SE/218 | Height Measuring System - Disposable Measuring Tape, Including Wall Dispenser |

Handrail Scale - EMR-Validated, Large Platform

Features

- Safe weighing due to sturdy handrail
- Large non-slip platform
- Non-tilting base made of heavy duty cast iron
- Impact & scratch-resistant powder coating
- 360° display for easy reading
- EMR-validated, transmits measured data directly to an electronic medical record system or printer
- Wide range of functions...
 - TARE
 - Pre-TARE
 - HOLD
 - Auto-HOLD
 - Auto-CLEAR
 - RESET
 - Automatic Switch-Off
 - Automatic Weighing Range Switch-Over
 - Adjustable Damping
 - BMI
- Rechargeable batteries / power adaptor
- Graduation 100g < 200kg > 200g
- Capacity 300kg

Dimensions (w x d x h)

- Overall Dimensions - 640 x 660 x 1150mm
- Platform Dimensions - 600 x 600 x 55mm

Options / Accessories

- 5SE/223 Telescopic Measuring Rod



5SE/645

| Item | Description | Weight |
|---------|--|--------|
| 5SE/645 | Handrail Scale - EMR-Validated, Large Platform | 25.4kg |



Telescopic Measuring Rod (suitable for 5SE/645)

Features

- Durable aluminium rod
- Easy-to-read, colour-coded graduations
- Measuring range - 60-230cm
- Graduation - 1mm

Dimensions (w x d x h)

- Overall Dimensions - 57 x 286 x 2320mm



5SE/223

| Item | Description | Weight |
|---------|--------------------------|--------|
| 5SE/223 | Telescopic Measuring Rod | 0.95kg |

Multifunctional Scale - EMR-Validated

Features

- Allows safe weighing of standing, sitting or wheelchair patients
- Handrail on three sides offers holding options, serving as an ideal standing aid
- Large platform with non-slip surface
- Ramp ensures safe access onto the weighing platform
- Wheel barrier provides extra safety
- Fold down seat allows for seated weighing
- 360° swivel display for easy reading
- Mobile due to integrated transport wheels
- Impact & scratch-resistant powder coating
- EMR-validated, transmits measured data directly to an electronic medical record system or printer
- RS232 interface for integration with Renal Systems
- Wide range of functions...
 - TARE
 - Pre-TARE
 - HOLD
 - Auto-HOLD
 - Auto-CLEAR
 - RESET
 - Automatic Weighing Range Switch-Over
 - Adjustable Damping
 - BMI
- Power adaptor
- Graduation 100g < 200kg > 200g
- Capacity 300kg

Dimensions (w x d x h)

- Overall Dimensions - 930 x 1070 x 1110mm
- Platform Dimensions - 800 x 840 x 55mm



5SE/685

| Item | Description | Weight |
|---------|---------------------------------------|--------|
| 5SE/685 | Multifunctional Scale - EMR-Validated | 59.5kg |



Wheelchair Scale - EMR-Validated, Handrail

Features

- Wheelchair accessible platform
- Large platform with non-slip surface
- Handrail at rear serves as an ideal standing aid
- Foldable to save space
- Easy to read display
- Mobile due to transport wheels
- Impact & scratch-resistant powder coating
- EMR-validated, transmits measured data directly to an electronic medical record system or printer
- RS232 interface for integration with Renal Systems
- Wide range of functions...
 - TARE
 - Pre-TARE
 - HOLD
 - Auto-HOLD
 - Auto-CLEAR
 - RESET
 - Automatic Weighing Range Switch-Over
 - Adjustable Damping
 - BMI
- Power adaptor
- Graduation 100g < 200kg > 200g
- Capacity 300kg

Dimensions (w x d x h)

- Overall Dimensions - 920 x 1150 x 1120mm
- Platform Dimensions - 800 x 965 x 55mm



5SE/677

| Item | Description | Weight |
|---------|--|--------|
| 5SE/677 | Wheelchair Scale - EMR-Validated, Handrail | 38.0kg |



Wheelchair Scale - EMR-Validated

Features

- Wheelchair accessible platform
- Large platform with non-slip surface
- Side rails ensure safe rolling of the wheelchair onto & from the scale
- Folds for easy transportation
- Easy to read display
- Impact & scratch-resistant powder coating
- EMR-validated, transmits measured data directly to an electronic medical record system or printer
- Wide range of functions...
 - TARE
 - Pre-TARE
 - HOLD
 - Auto-HOLD
 - Auto-CLEAR
 - RESET
 - Automatic Weighing Range Switch-Over
 - Adjustable Damping
 - BMI
- Rechargeable batteries / power adaptor
- Graduation 100g < 200kg > 200g
- Capacity 300kg

Dimensions (w x d x h)

- Overall Dimensions - 1102 x 1150 x 912mm
- Platform Dimensions - 800 x 965 x 55mm



SSE/665

| Item | Description | Weight |
|---------|----------------------------------|--------|
| SSE/665 | Wheelchair Scale - EMR-Validated | 33.4kg |



Platform Scale - EMR-Validated, Remote Display

Features

- Allows safe weighing of standing or wheelchair patients
- Large wheelchair accessible platform with non-slip surface
- Cable remote display for wall mounting or table installation
- Impact & scratch-resistant powder coating
- EMR-validated, transmits measured data directly to an electronic medical record system or printer
- Wide range of functions...
 - TARE
 - Pre-TARE
 - HOLD
 - Auto-HOLD
 - RESET
 - Automatic Weighing Range Switch-Over
 - Adjustable Damping
 - BMI
- Power adaptor
- Graduation 100g < 200kg > 200g
- Capacity 300kg

Dimensions (w x d x h)

- Overall Dimensions - 904 x 1064 x 70mm
- Platform Dimensions - 800 x 965 x 55mm



SSE/675

| Item | Description | Weight |
|---------|--|--------|
| SSE/675 | Platform Scale - EMR-Validated, Remote Display | 27.0kg |



Stretcher Scale - EMR-Validated, Remote Display

Features

- Allows safe weighing of patients while lying down on the stretcher
- Extra-large platform with non-slip surface
- Cable remote display for wall mounting or table installation
- Impact & scratch-resistant powder coating
- EMR-validated, transmits measured data directly to an electronic medical record system or printer
- Wide range of functions...
 - TARE
 - Pre-TARE
 - HOLD
 - Auto-HOLD
 - RESET
 - Automatic Weighing Range Switch-Over
 - Adjustable Damping
 - BMI
- Power adaptor
- Graduation 100g < 200kg > 200g
- Capacity 300kg

Dimensions (w x d x h)

- Overall Dimensions - 910 x 1680 x 93mm
- Platform Dimensions - 800 x 1465 x 55mm



5SE/657

Shown with stretcher (not included)



| Item | Description | Weight |
|---------|---|--------|
| 5SE/657 | Stretcher Scale - EMR-Validated, Remote Display | 46.2kg |



Stretcher Scale - Stand for Cable Remote Display (suitable for 5SE/635, 5SE/657 & 5SE/675)

Features

- Stable platform with non-slip rubber feet
- Sturdy, durable construction
- Can also be used as a stand for external printer
- Sturdy construction for cable remote display of the scales 5SE/635, 5SE/657 and 5SE/675

Dimensions (w x d x h)

- Overall Dimensions - 460 x 1035 x 460mm



5SE/472

| Item | Description | Weight |
|---------|--|--------|
| 5SE/472 | Stretcher Scale - Stand for Cable Remote Display (suitable for 5SE/635, 5SE/657 & 5SE/675) | 7.8kg |

Chair Scale - EMR-Validated

Features

- Fold-up arms & footrests allows side access for patients & care givers
- Ergonomic seat for increased patient comfort
- Suitable for patients affected by obesity
- Display positioned at the rear of the seat allows for easy reading
- Impact & scratch-resistant powder coating
- 100mm pressed steel castors, 2 off braking
- EMR-validated, transmits measured data directly to an electronic medical record system or printer
- Wide range of functions...
 - TARE
 - Pre-TARE
 - HOLD
 - Auto-HOLD
 - Auto-CLEAR
 - RESET
 - Automatic Switch-Off
 - Automatic Weighing Range Switch-Over
 - Adjustable Damping
 - BMI
- Rechargeable batteries / power adaptor
- Graduation 50g < 150kg > 100g < 250kg > 200g
- Capacity 300kg

Dimensions (w x d x h)

- Overall Dimensions - 563 x 978 x 897mm
- Seat Height - 528mm
- Seat Width - 455mm



5SE/959

| Item | Description | Weight |
|---------|-----------------------------|--------|
| 5SE/959 | Chair Scale - EMR-Validated | 24.5kg |



Chair Scale - 200kg Capacity

Features

- Fold-up arms & footrests allows side access for patients & care givers
- Ergonomic seat for increased patient comfort
- Display positioned at the rear of the seat allows for easy reading
- Impact & scratch-resistant powder coating
- 100mm pressed steel castors, 2 off braking
- Wide range of functions...
 - TARE
 - HOLD
 - Automatic Switch-Off
- Battery powered (6 x AA)
- Graduation 100g
- Capacity 200kg

Dimensions (w x d x h)

- Overall Dimensions - 563 x 978 x 897mm
- Seat Height - 528mm
- Seat Width - 455mm



5SE/956

| Item | Description | Weight |
|---------|------------------------------|--------|
| 5SE/956 | Chair Scale - 200kg Capacity | 22.4kg |

Chair Scale - 250kg Capacity

Features

- Fold-up arms & footrests allows side access for patients & care givers
- Ergonomic seat for increased patient comfort
- Display positioned at the rear of the seat allows for easy reading
- Impact & scratch-resistant powder coating
- 100mm pressed steel castors, 2 off braking
- Wide range of functions...
 - TARE
 - Pre-TARE
 - HOLD
 - Auto-HOLD
 - Auto-CLEAR
 - Adjustable Damping
 - BMI
- Rechargeable batteries / power adaptor
- Graduation 50g < 150kg > 100g
- Capacity 250kg

Dimensions (w x d x h)

- Overall Dimensions - 563 x 978 x 897mm
- Seat Height - 528mm
- Seat Width - 455mm



5SE/955

| Item | Description | Weight |
|---------|------------------------------|--------|
| 5SE/955 | Chair Scale - 250kg Capacity | 24.5kg |



ECG Machine - Resting, EMIS Integration, 12 Lead, USB Interface

Features

- Data transfer via USB connection with high quality 12 lead ECG acquisition
- High quality recording with a sampling rate of up to 32kHz
- Status LED for each lead indicates safe ECG acquisition
- True wave filter technology for perfect ECG signal quality
- Clear surface for quick & easy disinfection
- Exact measurement of pacemaker amplitude & width
- Fully integrated with EMR systems - EMIS, SystemOne, & Medicus
- Annual software license fee for EMIS integration
- Compatible with leading EMR systems Vision, Semble, RiO & others

Dimensions (w x d x h)

- Overall Dimensions - 78 x 118 x 23mm

Options / Accessories

- 5SE/Q-TAB - ECG Electrodes - Disposable
- 5SE/AL/CLIP - ECG Electrodes - Alligator Clips
- 5SE/AL/CON - ECG Electrodes - Snap Connectors
- 5SE/689 - Bluetooth Dongle



5SE/CT330

| Item | Description | Weight |
|-----------|---|--------|
| 5SE/CT330 | ECG Machine - Resting, EMIS Integration, 12 Lead, USB Interface | 0.12kg |



systemone

EMIS

Medicus.

ECG Machine - Resting, EMIS Integration, 12 Lead, USB & Bluetooth Interface

Features

- Wireless & lightweight
- Data transfer via Bluetooth or USB connection with high quality 12 lead ECG acquisition
- Inbuilt rechargeable batteries provide for up to 12hrs of run-time (charge via USB port)
- High quality recording with a sampling rate of up to 32kHz
- Status LED for each lead indicates safe ECG acquisition
- True wave filter technology for perfect ECG signal quality
- Clear surface for quick & easy disinfection
- Exact measurement of pacemaker amplitude & width
- Fully integrated with EMR systems - EMIS, SystmOne & Medicus
- Annual software license fee for EMIS integration
- Compatible with leading EMR systems Vision, Semble, RiO & others

Dimensions (w x d x h)

- Overall Dimensions - 78 x 118 x 23mm

Options / Accessories

- 5SE/Q-TAB - ECG Electrodes - Disposable
- 5SE/AL/CLIP - ECG Electrodes - Alligator Clips
- 5SE/AL/CON - ECG Electrodes - Snap Connectors
- 5SE/689 - Bluetooth Dongle



5SE/CT331

| Item | Description | Weight |
|-----------|---|--------|
| 5SE/CT331 | ECG Machine - Resting, EMIS Integration, 12 Lead, USB & Bluetooth Interface | 0.14kg |



systemone



Medicus.

ECG Machine - Portable, Interpretive, 12 Lead, 5" Colour Display

Features

- Quick & easy-to-use
- On-screen preview of ECG, allows recorded ECG to be reviewed prior to printing
- Outstanding signal quality for adult & paediatric ECG's due to high sample frequency
- Advanced adult & paediatric clinical interpretation - ETM algorithm
- Sealed keyboard
- 5" colour LCD, with lead off indicator
- Compatible with EMR systems - EMIS, systmone, Vision, Semble, RiO & others

Dimensions (w x d x h)

- Overall Dimensions - 285 x 61 x 189mm

Options / Accessories

- 5SE/Q-TAB - ECG Electrodes - Disposable
- 5SE/AL/CLIP - ECG Electrodes - Alligator Clips
- 5SE/AL/CON - ECG Electrodes - Snap Connectors
- 5SE/802Z - ECG Paper
- 5SE/700.8000i-2 - Carry Case

3 year warranty



5SE/CT8000i-2

| Item | Description | Weight |
|---------------|---|--------|
| 5SE/CT8000i-2 | ECG Machine - Portable, Interpretive, 5" Colour Display | 1.9kg |

ECG Machine - Portable, Advanced Interpretation, 12 Lead, Wi-Fi Interface, 8" Colour Touchscreen Display

Features

- Ultra-lightweight easy to use device
- 8" colour high-resolution, multi-touch screen
- Wi-Fi connectivity & link software included as standard
- Rechargeable batteries / power adaptor
- Anatomical hook-up adviser, helps to correctly place the electrodes
- Lead reversal warnings & misplaced electrodes are immediately displayed before ECG acquisition
- High volume internal memory - storage of up to 350 ECG's
- Advanced ETM Interpretation, with ETM Sport (Seattle Criteria)
- Compatible with EMR systems - EMIS, systmone, Vision, Semble, RiO & others

Dimensions (w x d x h)

- Overall Dimensions - 230 x 30 x 160mm

Options / Accessories

- 5SE/Q-TAB - ECG Electrodes - Disposable
- 5SE/AL/CLIP - ECG Electrodes - Alligator Clips
- 5SE/AL/CON - ECG Electrodes - Snap Connectors
- 5SE/802Z - ECG Paper
- 5SE/ 700.Pad-2 - Carry Case



5SE/CARDIOPAD-2



| Item | Description | Weight |
|-----------------|--|--------|
| 5SE/CARDIOPAD-2 | ECG Machine - Portable, Advanced Interpretation, 12 Lead, Wi-Fi Interface, 8" Colour Touchscreen Display | 1.1kg |

ECG Machine - Advanced Interpretation, 12 Lead, Wi-Fi Interface, 8" Colour LCD

Features

- Robust, ideal for busy clinics
- 8" colour high-resolution screen
- Wi-Fi connectivity & link software included as standard
- Rechargeable batteries / power adaptor
- Anatomical hook-up adviser, helps to correctly place the electrodes
- Lead reversal, warnings & misplaced electrodes are immediately displayed before ECG acquisition
- High volume internal memory - storage of up to 350 ECG's
- Capture & store 10 minutes of uninterrupted 12 lead data to document intermittent arrhythmias
- Excellent signal quality - ideal for paediatric ECG's
- Compatible with EMR systems - EMIS, systmone, Vision, Semble, RiO & others
- Exercise ECG protocols for treadmills / ergometers (optional extra)

Dimensions (w x d x h)

- Overall Dimensions - 384 x 90 x 319mm



Options / Accessories

- 5SE/Q-TAB - ECG Electrodes - Disposable
- 5SE/AL/CLIP - ECG Electrodes - Alligator Clips
- 5SE/AL/CON - ECG Electrodes - Snap Connectors
- 5SE/858Z.CT8000P-2 - ECG Paper



5SE/CT8000P-2

Option - (ECG paper, see page 315)



| Item | Description | Weight |
|---------------|--|--------|
| 5SE/CT8000P-2 | ECG Machine - Advanced Interpretation, 12 Lead, Wi-Fi Interface, 8" Colour LCD | 4.5kg |

ECG Machine - Height Adjustable ECG Cart with Utility Storage Bin

Features

- Compatible with all seca ECG machines
- Easy height adjustment by using the foot pedal
- Braked castors for more stability and safety
- Cable covers and cord organiser at rear of cart help protect leads
- Storage bin with dividers for accessories
- Easy to clean and disinfect
- Height adjustable from 812-1021mm

Dimensions (w x d x h)

- Overall Dimensions - 480 x 577 x 812 - 1021mm



5SE/CT500-2

| Item | Description | Weight |
|-------------|---|--------|
| 5SE/CT500-2 | ECG Machine - Height Adjustable ECG Cart with Utility Storage Bin | 21.3kg |

ECG Electrodes - Disposable (suitable for 5SE/CT330, 5SE/ CT331, 5SE/CT8000i-2, 5SE/ CARDIOPAD-2 & CT8000P-2)

Features

- Large tap attachment area uses small or large clips
- Patented traction liner prevents tabs from sliding off the liner
- Unique liner card ensures packs do not stick together
- Adhesive solid gel requires minimal clean-up
- Latex-free



| Item | Description |
|-----------|-----------------------------|
| 5SE/Q-TAB | ECG Electrodes - Disposable |

ECG Electrodes - Alligator Clips (suitable for 5SE/CT330, 5SE/ CT331, 5SE/CT8000i-2, 5SE/ CARDIOPAD-2 & CT8000P-2)

Features

- 4mm for disposable tab electrodes
- Supplied in packs of 10



| Item | Description |
|-------------|----------------------------------|
| 5SE/AL/CLIP | ECG Electrodes - Alligator Clips |

ECG Electrodes - Snap Connectors (suitable for 5SE/CT330, 5SE/ CT331, 5SE/CT8000i-2, 5SE/ CARDIOPAD-2 & CT8000P-2)

Features

- For use with disposable tab & press stud electrodes (fits 3mm and 4mm patient cables)
- Supplied in packs of 10



| Item | Description |
|------------|----------------------------------|
| 5SE/AL/CON | ECG Electrodes - Snap Connectors |

ECG Paper (suitable for 5SE/ CT8000i-2)

Features

- 40 sheets per pack
- Supplied in packs of 5



| Item | Description |
|--------------------|-------------|
| 5SE/802Z.CT8000i-2 | ECG Paper |

ECG Paper (suitable for 5SE/ CARDIOPAD-2)

Features

- 50 sheets per pack
- Supplied in packs of 5



| Item | Description |
|---------------|-------------|
| 5SE/492.Pad-2 | ECG Paper |

ECG Paper (suitable for 5SE/ CT8000P-2)

Features

- 220 sheets per box
- Supplied in packs of 5



| Item | Description |
|--------------------|-------------|
| 5SE/858Z.CT8000P-2 | ECG Paper |

Bluetooth Dongle (suitable for 5SE/CT330 & 5SE/CT331)

Features

- Bluetooth USB dongle



| Item | Description |
|---------|------------------|
| 5SE/689 | Bluetooth Dongle |

Carry Case (suitable for 5SE/CT8000i-2)

Features

- Compact & lightweight
- Lined with foam pads, to protect the ECG during mobile use
- Provides safe transportation

Dimensions (w x d x h)

- Overall Dimensions - 360 x 300 x 160mm



| Item | Description | Weight |
|-----------------|-------------|--------|
| 5SE/700.8000i-2 | Carry Case | 0.5kg |

Carry Case (suitable for 5SE/CARDIOPAD-2)

Features

- Compact & lightweight
- Lined with foam pads, to protect the ECG during mobile use
- Provides safe transportation

Dimensions (w x d x h)

- Overall Dimensions - 360 x 300 x 160mm



| Item | Description | Weight |
|---------------|-------------|--------|
| 5SE/700.Pad-2 | Carry Case | 0.5kg |





Manufacturing Medical Furniture & Equipment Since 1953

With over 70 years of experience, Bristol Maid is a leading manufacturer and supplier of medical furniture & equipment.

From design and manufacture to supply and installation, Bristol Maid has a reputation for providing high product quality, excellent customer service and value for money.

We take pride in working in close partnership with our customers applying innovative design and technology to deliver effective solutions for today while anticipating the needs of tomorrow.



Hospital Metalcraft Limited
Blandford Heights, Blandford Forum,
Dorset. DT11 7TG, UK

Tel: +44 (0) 1258 451338
Fax: +44 (0) 1258 455056
sales@bristolmaid.com

www.bristolmaid.com

MKT-180225-288-1

